


# ARTICLE.

VERSION 1.0

## Assembly Instructions

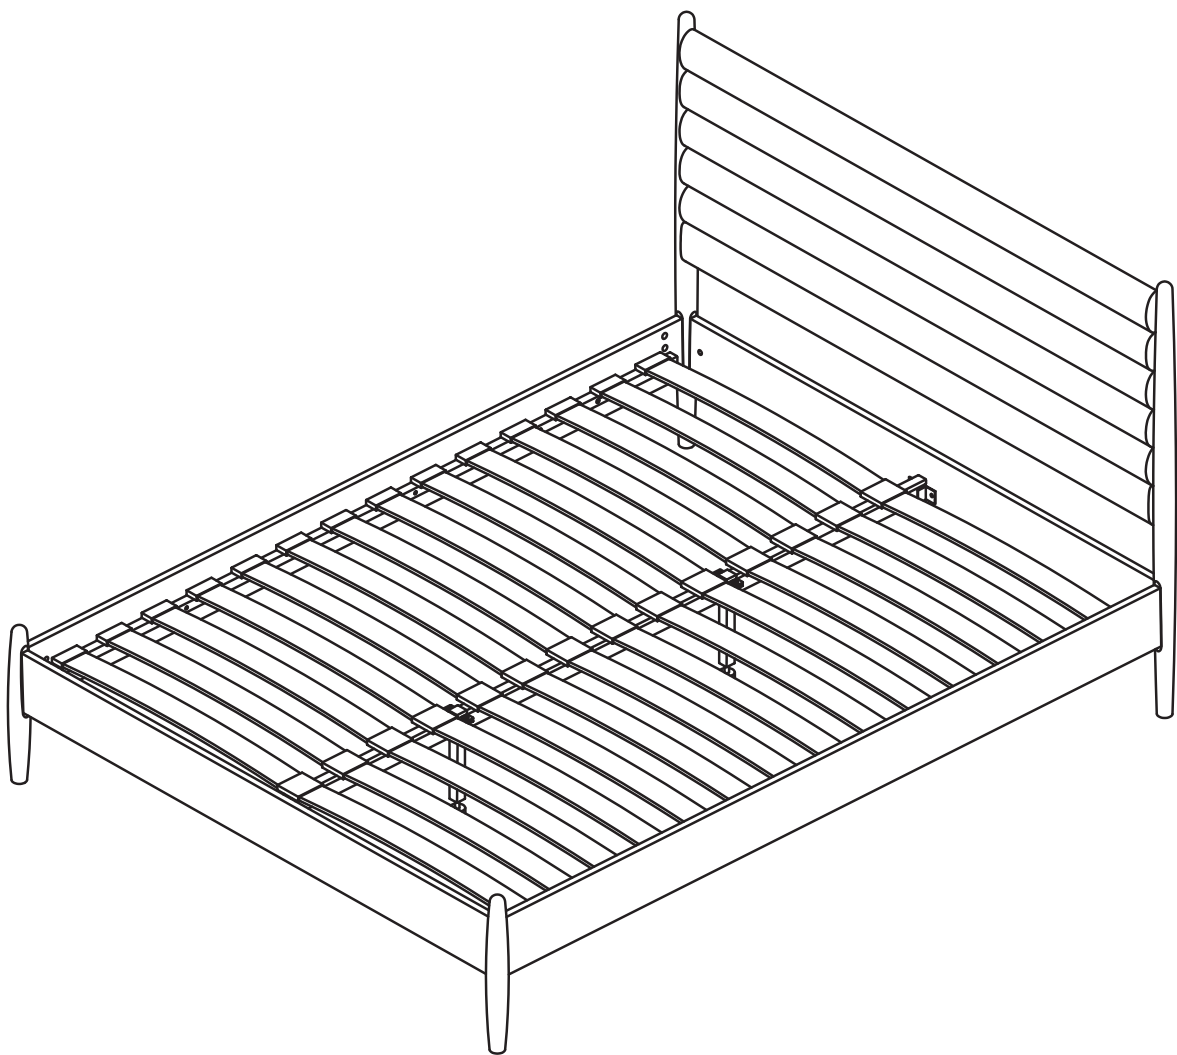

# LENIA

Upholstered Bed

ASSEMBLY INSTRUCTIONS

Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.

When assembling, place all parts on a soft, clean, and flat surface such as a carpet to prevent scratches.

If you’re having difficulty, our friendly Customer Care team is always here to help. Call us at **1.888.746.3455** during business hours, email **service@article.com** or chat live at **article.com**.



TIME






DIFFICULTY











# OF PEOPLE





REQUIRED TOOL  
Pozidriv screwdriver

PARTS INVENTORY		
ID	DESCRIPTION	QTY
A	HEADBOARD	1
B	FOOTBOARD	1
C	CENTER BEAM BRACKET 	2
D	LEFT SIDE RAIL	1
E	RIGHT SIDE RAIL	1
F	CENTER BEAM	1
G	CENTER LEG BRACKET (PRE-INSTALLED)	2
H	FLOATING CENTER LEG	2
I	SLAT CLIP 	28
J	SLAT	28
K	SLAT CENTER BRACKET 	14


PARTS INVENTORY CONT.		
ID	DESCRIPTION	QTY
L	FELT PAD 	4
M	ALLEN KEY 	1
N	M6 × 12MM BOLT 	4
O	COMPRESSION FITTING ANCHOR 	10
P	M8 × 8.5MM SCREW 	4
Q	M7.5 × 7MM SCREW 	6
R	M6 × 20MM BOLT (PRE-INSTALLED) 	4





Structural integrity is warranted only if all fasteners are properly installed & tightened, and the bed is moved only per instructions.

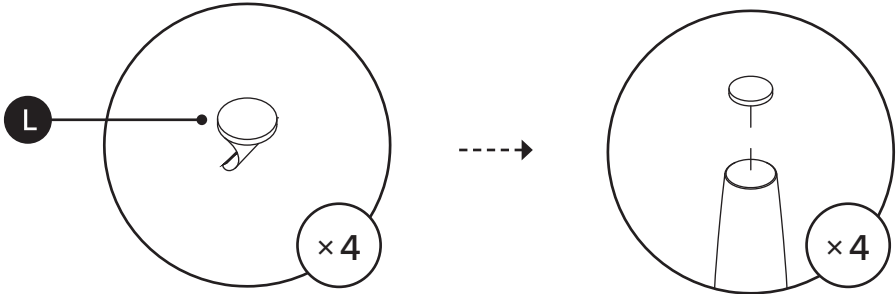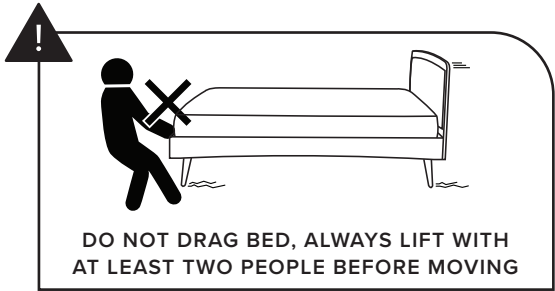





2

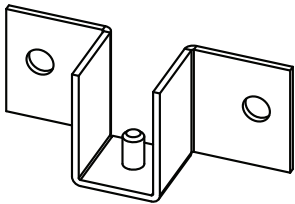

! Ensure center beam brackets (C) are level when installed.

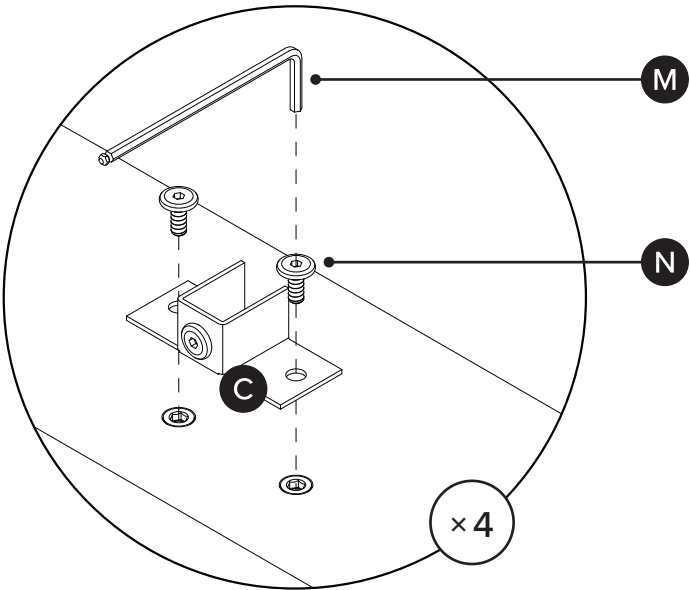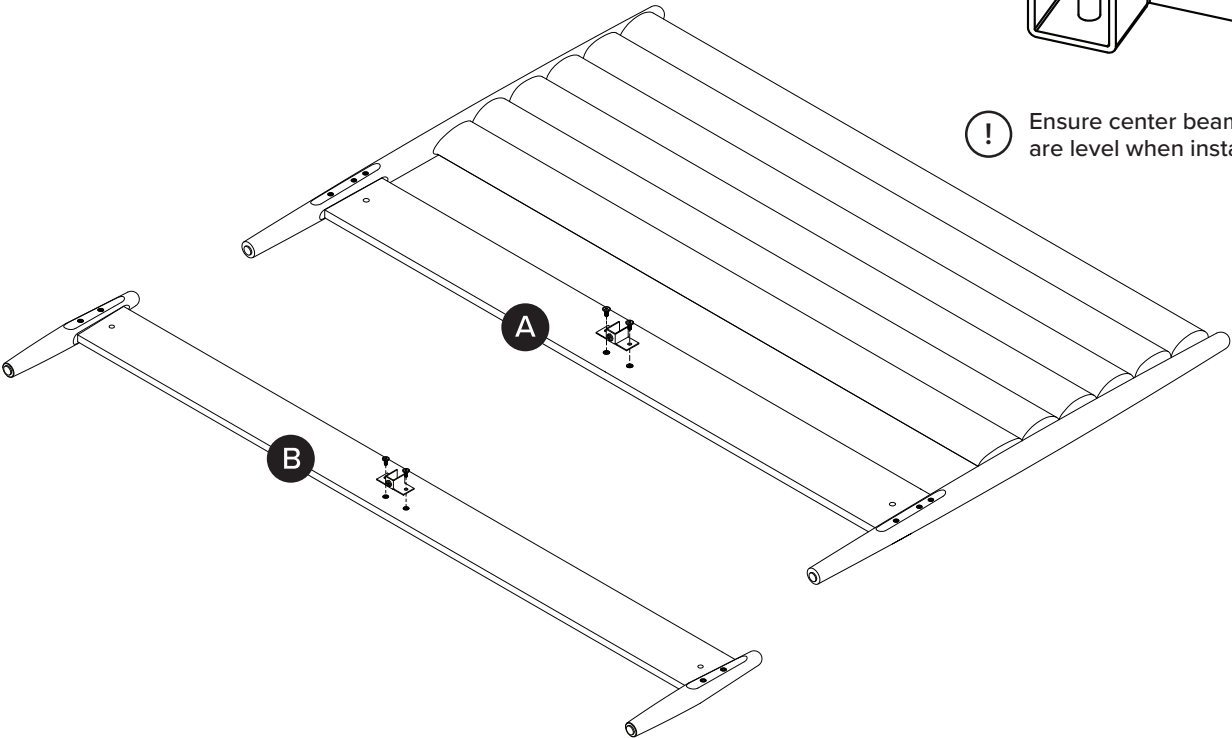

3

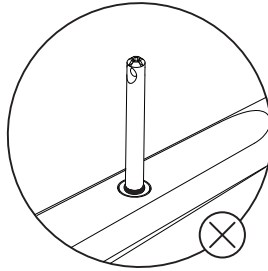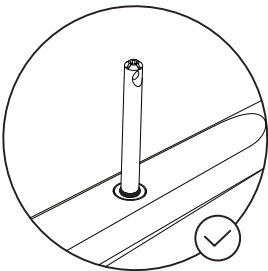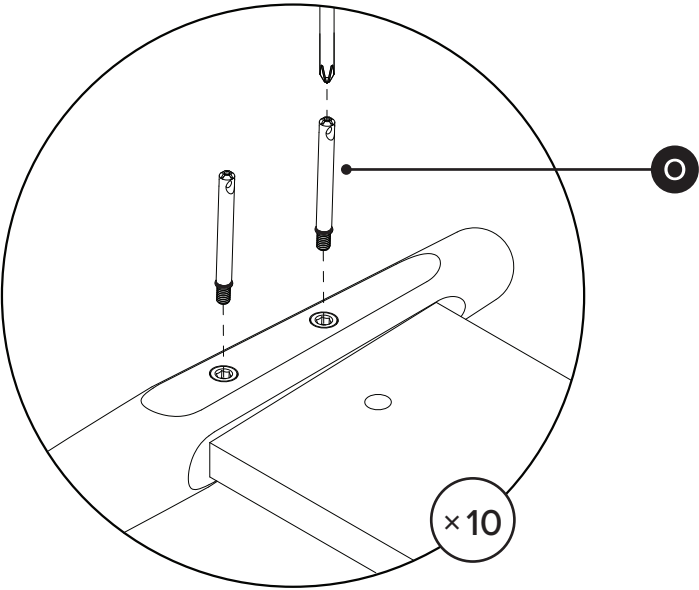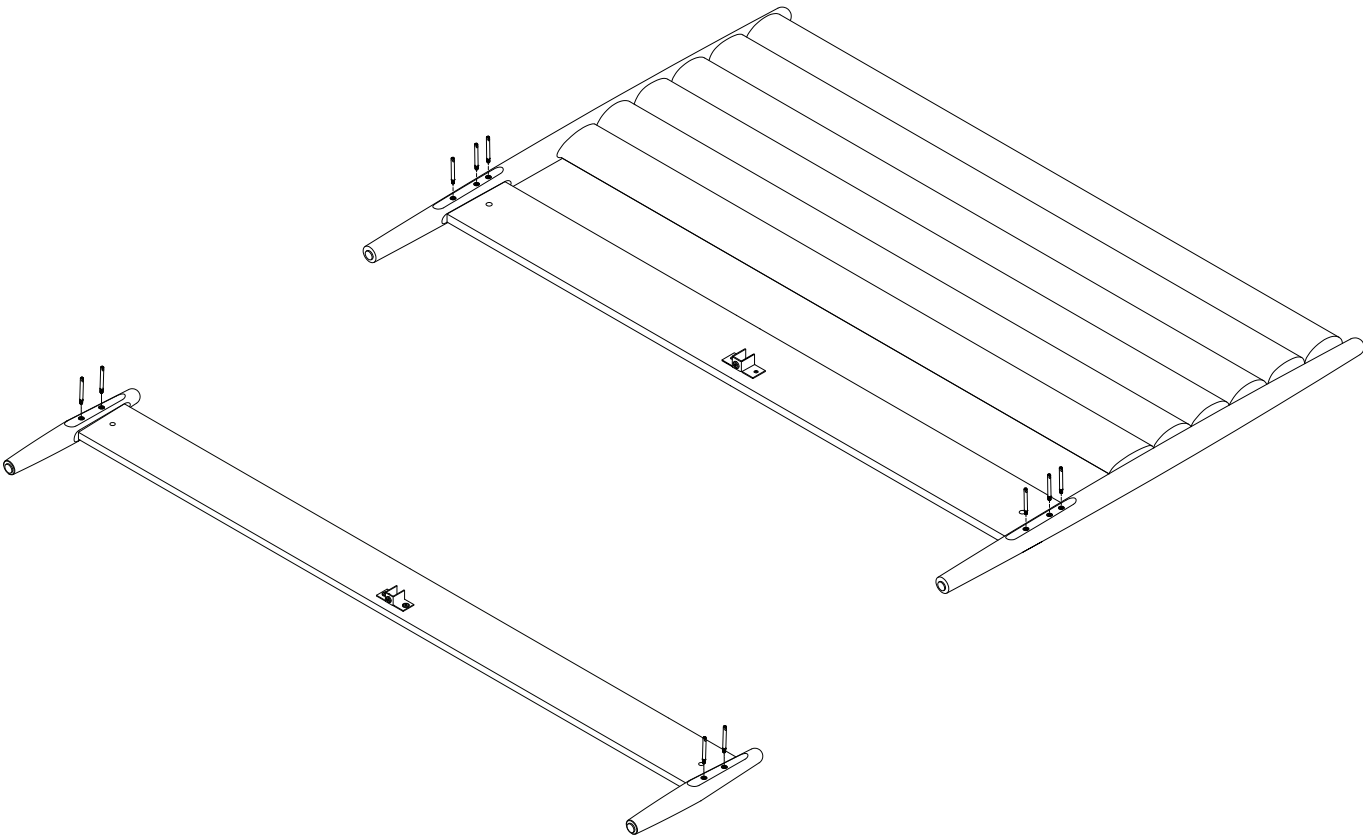

! Holes on compression fitting anchors (E) must be facing inwards on bed legs. Ensure rubber seal on anchors are tight.



4

Labels on side rails indicate orientation.  
THIS SIDE UP / THIS SIDE HEADBOARD





D


E

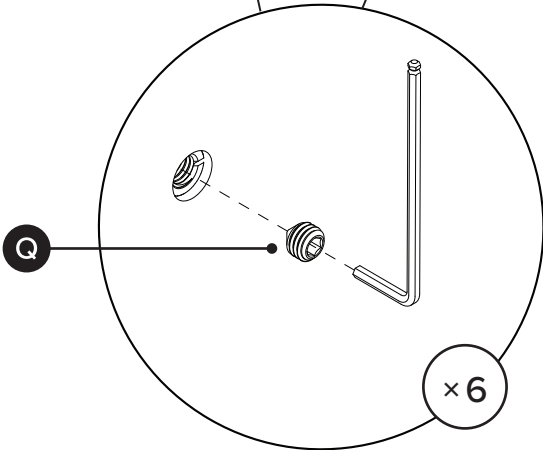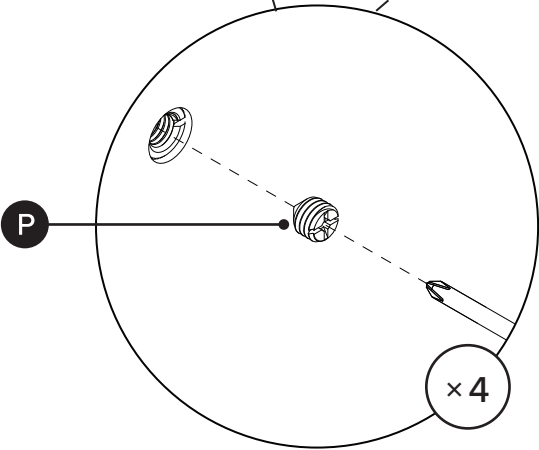

5

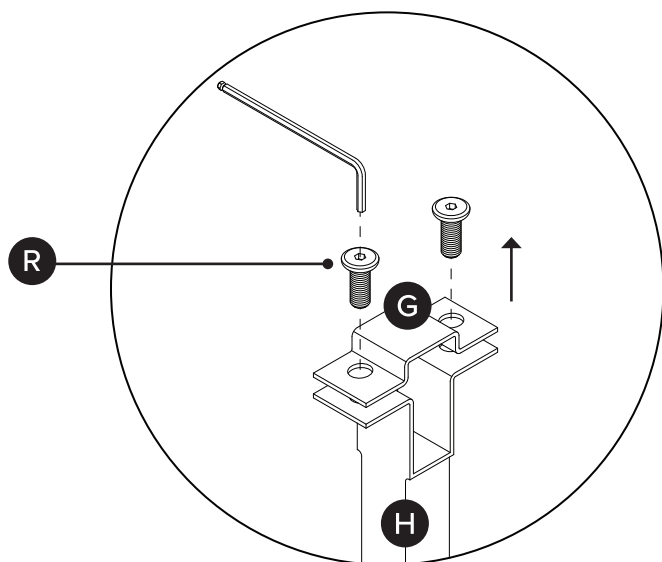
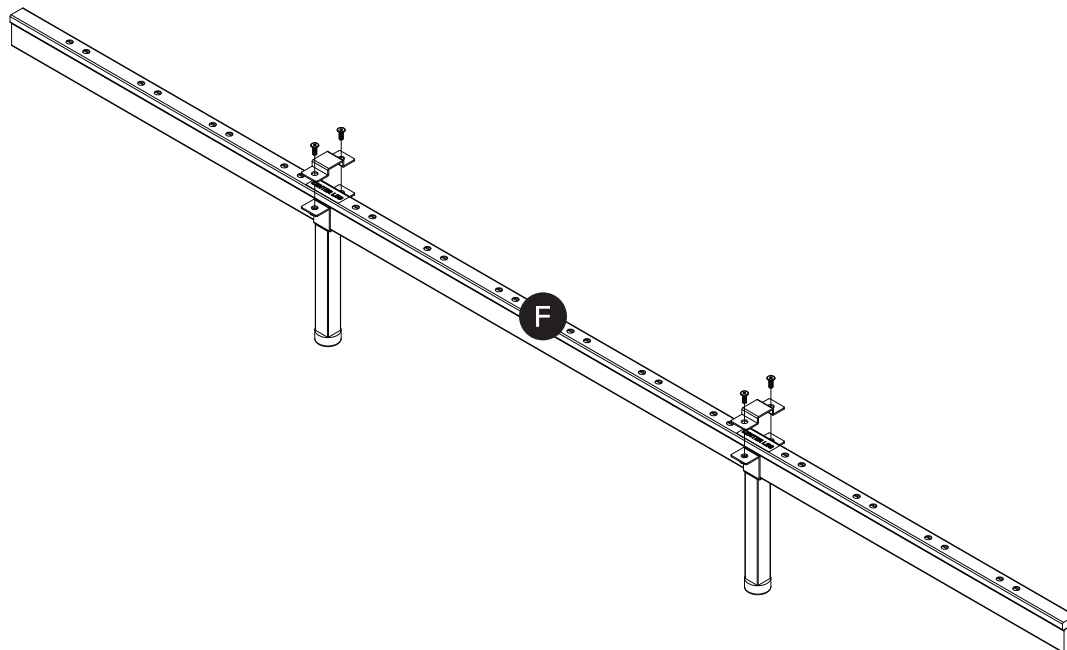


! Unscrew bolts (R) from center leg brackets (G) and floating center legs (H) before attaching to center beam (F).

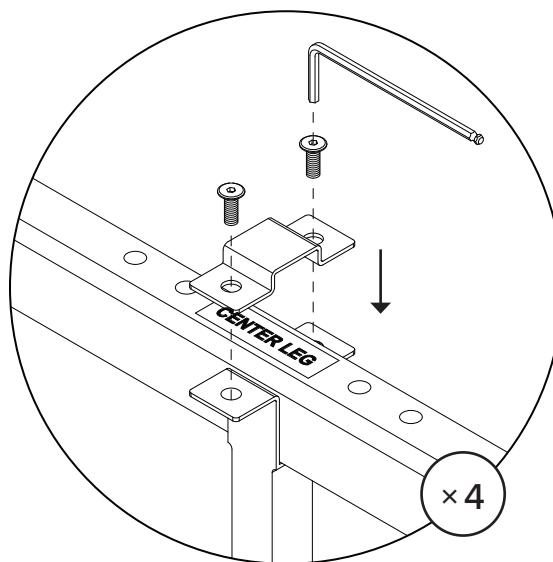


! Attach floating center legs (H) where labels are situated on center beam (F). Ensure that legs are straight, perpendicular to center beam.

6

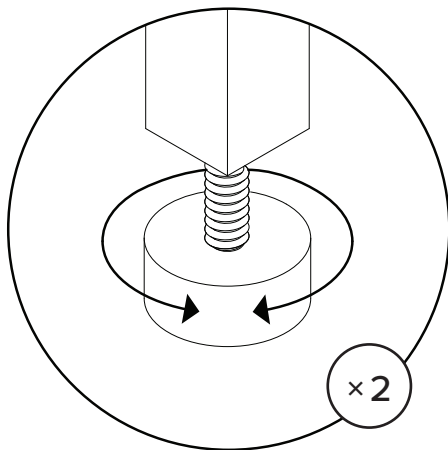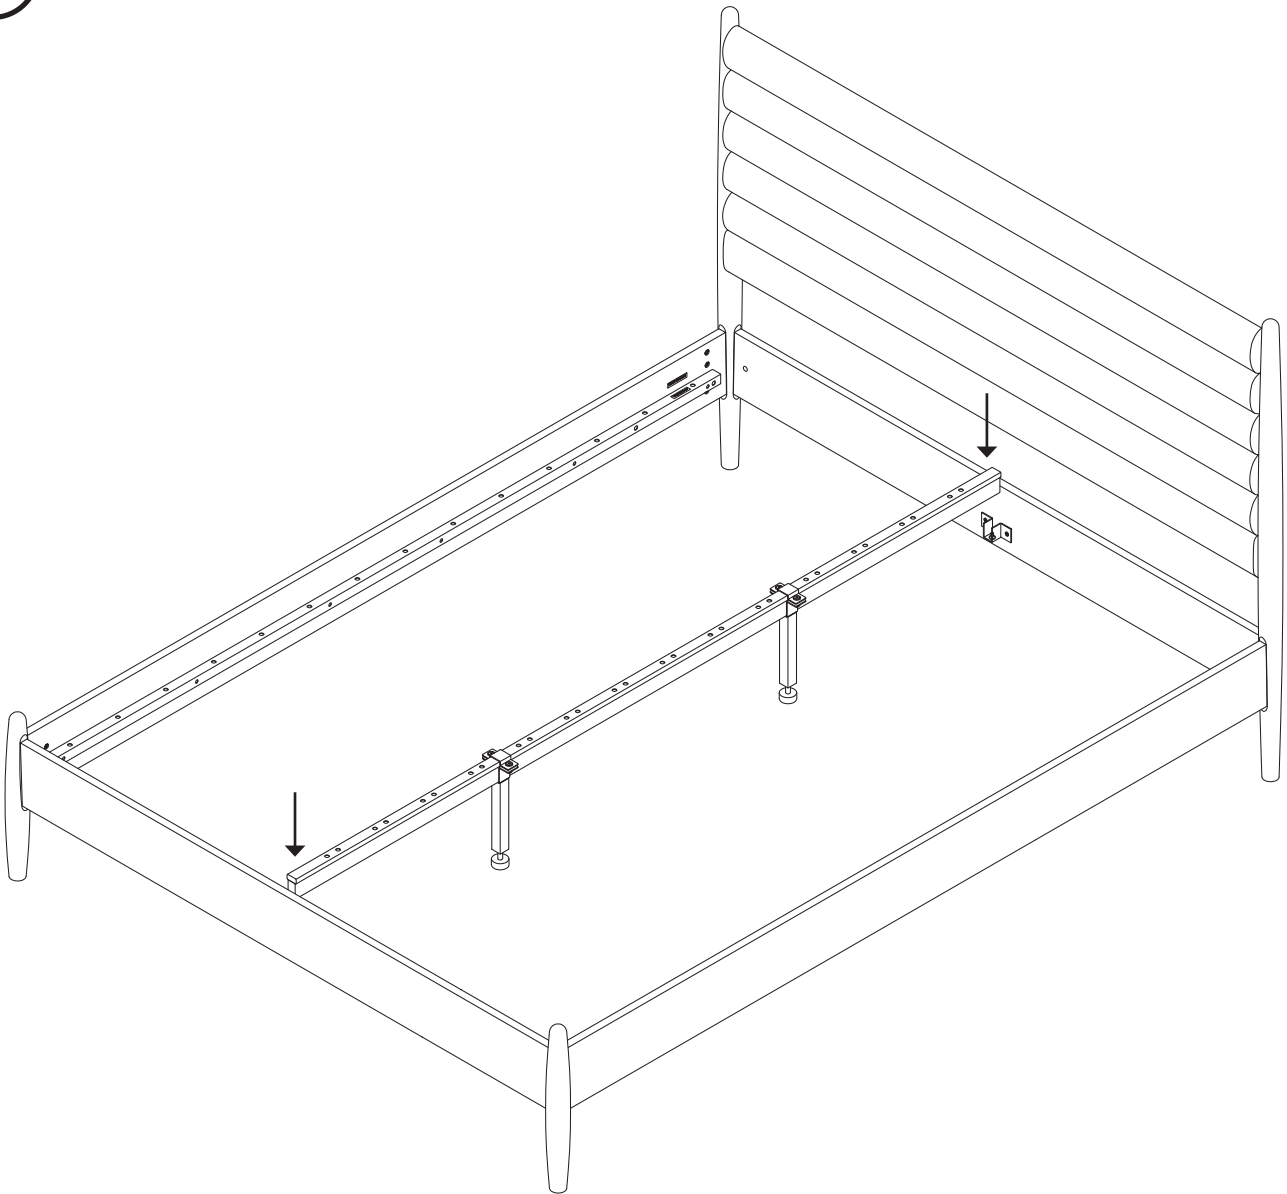


! Adjust levelers on floating center legs to allow for a 3-5mm clearance.

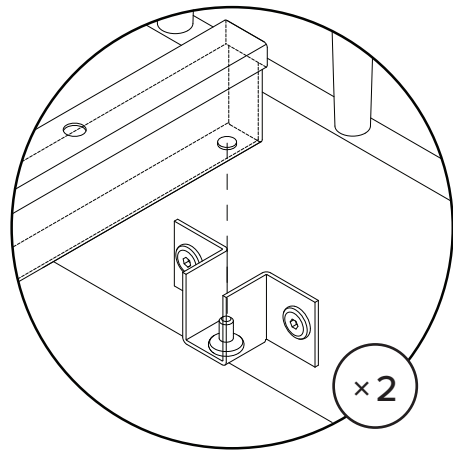


! Insert pins on center beam brackets into center beam when installing.




7A

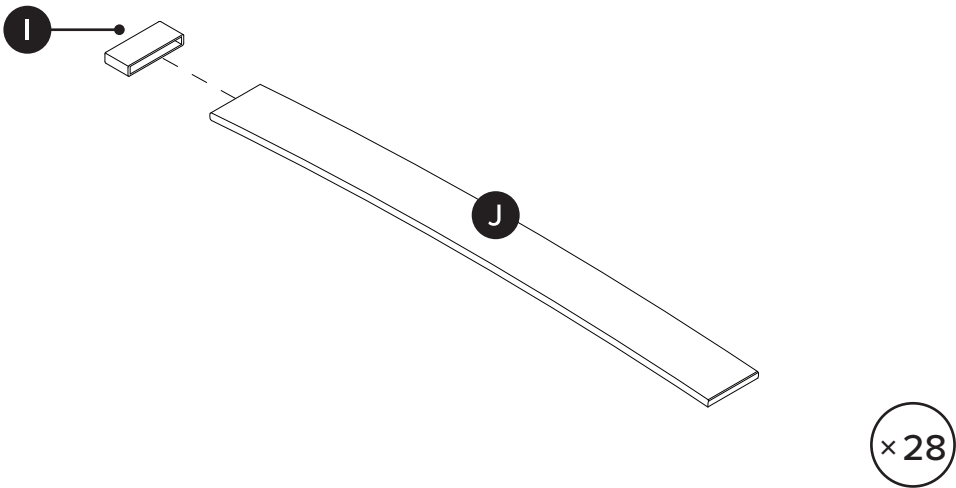


7B

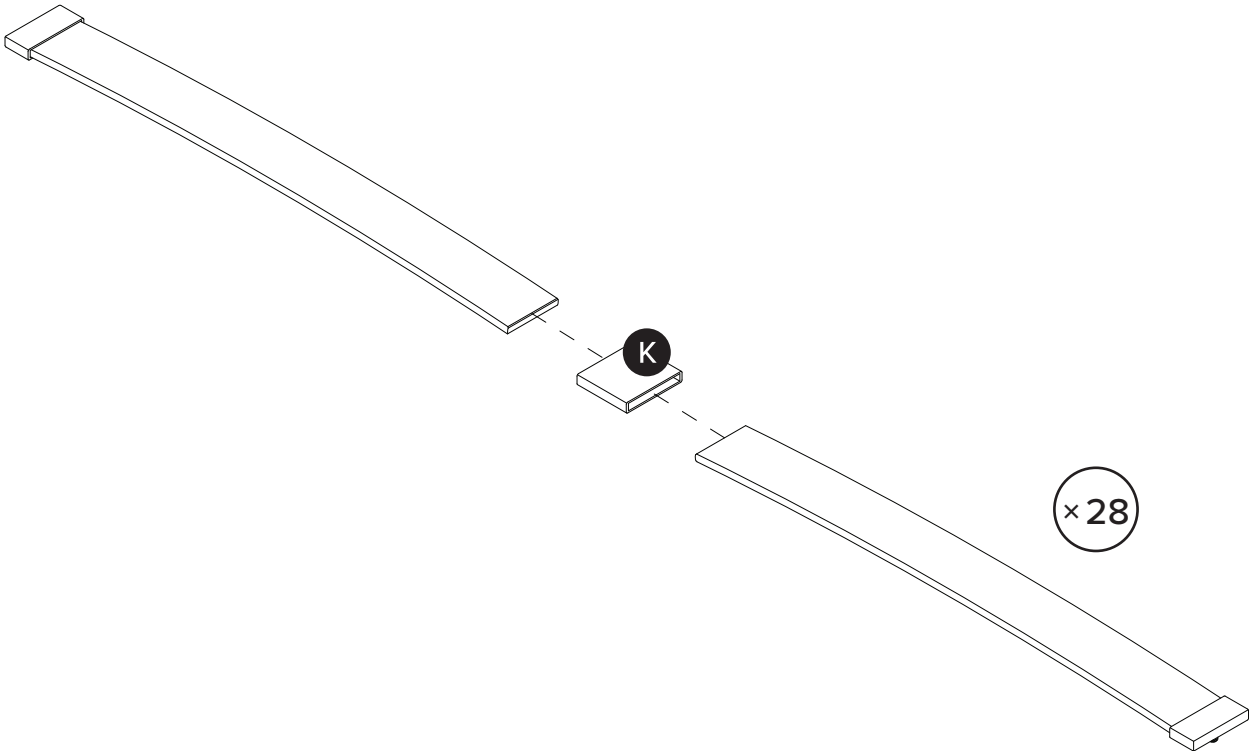

8

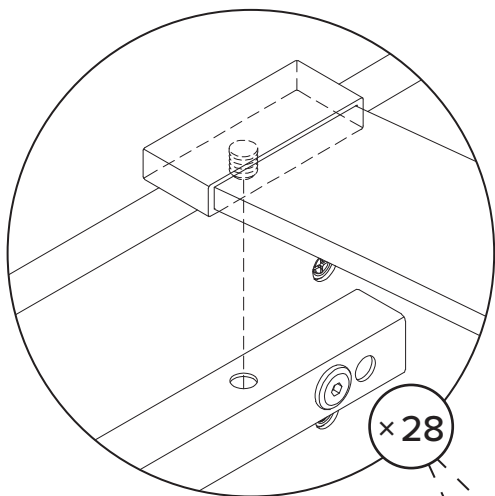

! First, firmly insert pins on  
slat clips into side rails.

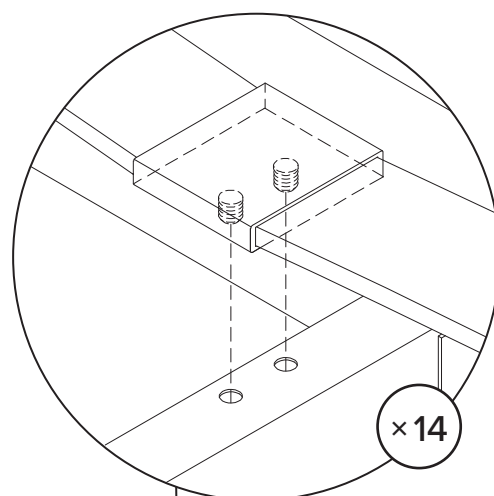

! Second, firmly insert pins on slat  
center brackets into center beam.

