


ARTICLE.

VERSION 1.0

Assembly Instructions

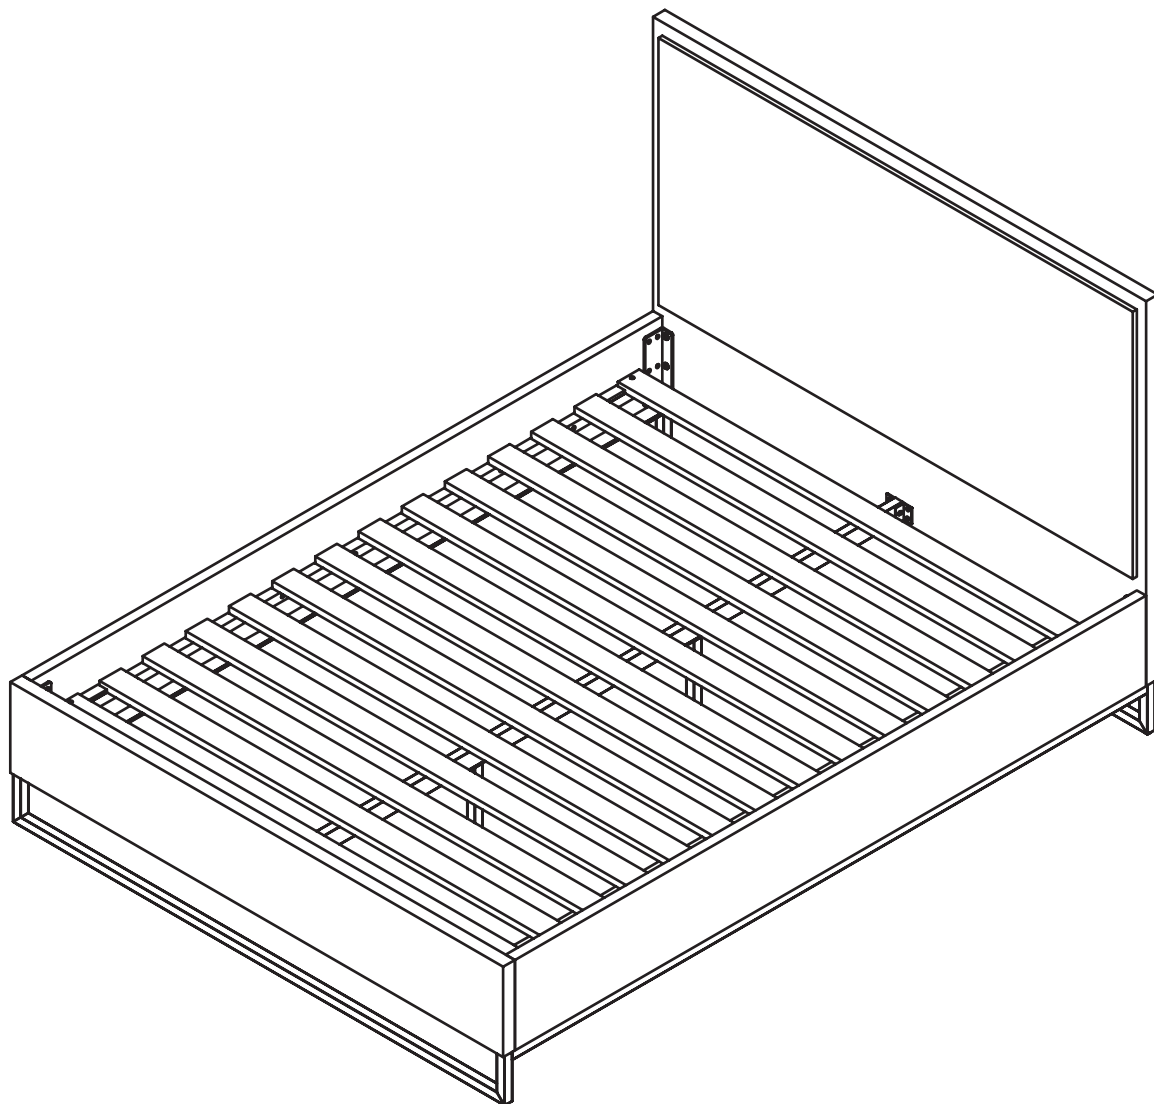

MAGNEL


Bed

ASSEMBLY INSTRUCTIONS

Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.

When assembling, place all parts on a soft, clean, and flat surface such as a carpet to prevent scratches.

If you're having difficulty, our friendly Customer Care team is always here to help. Call us at **1.888.746.3455** during business hours, email **service@article.com** or chat live at **article.com**.

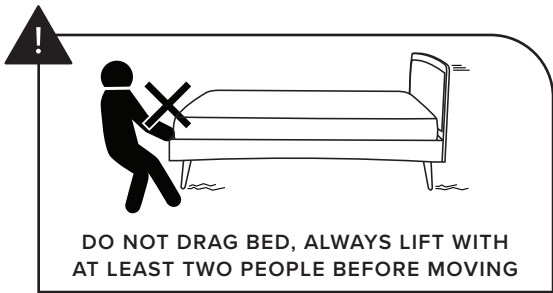

1 hour

TIME

5






DIFFICULTY

OF PEOPLE

REQUIRED TOOL

! Structural integrity is only guaranteed if all bolts are installed and properly tightened.




| PARTS INVENTORY | | |
|-----------------|-------------|-----|
| ID | DESCRIPTION | QTY |
| A | HEADBOARD | 1 |
| B | FOOTBOARD | 1 |
| C | SIDE FRAME | 2 |
| D | CENTER BEAM | 1 |
| E | LEG | 2 |
| F | SLATS | 1 |

| PARTS INVENTORY CONT. | | |
|-----------------------|--|-----|
| ID | DESCRIPTION | QTY |
| G | ALLEN KEY  | 1 |
| H | M8 × 25MM BOLT  | 12 |
| I | M6 × 20MM BOLT  | 14 |
| J | WASHER  | 14 |
| K | SCREW  | 4 |



1



! To avoid misalignment and overtightening, pieces are only to be tightened to 85% prior to full assembly.

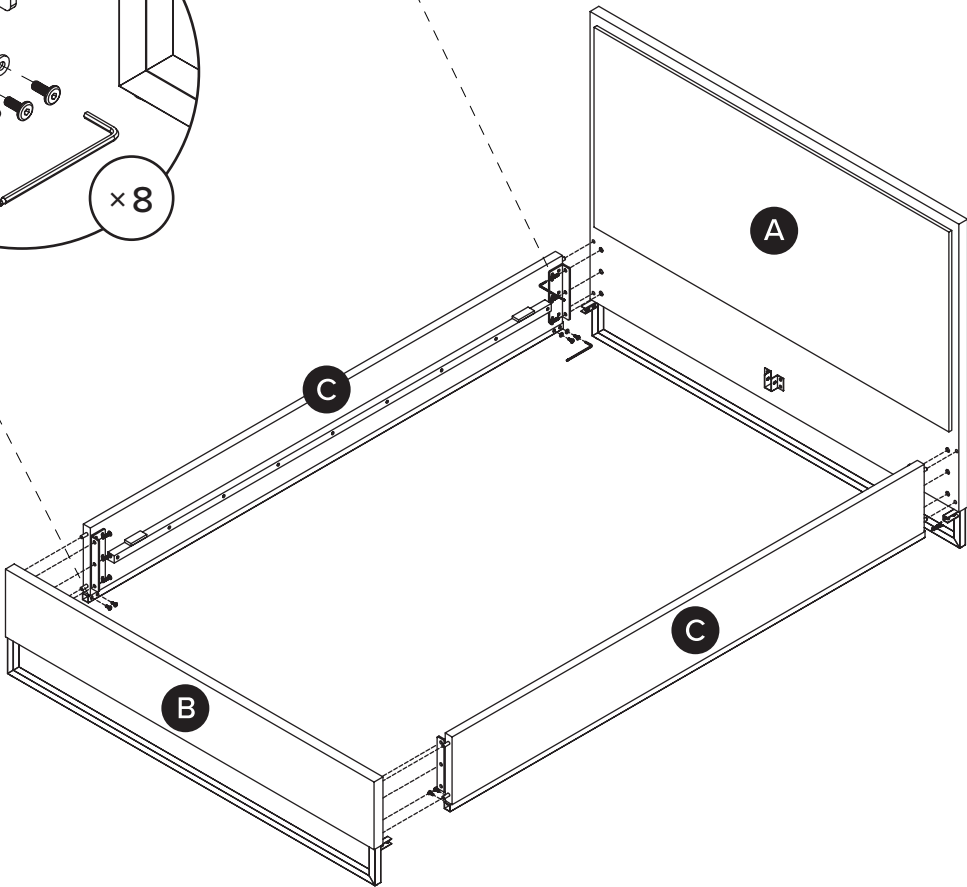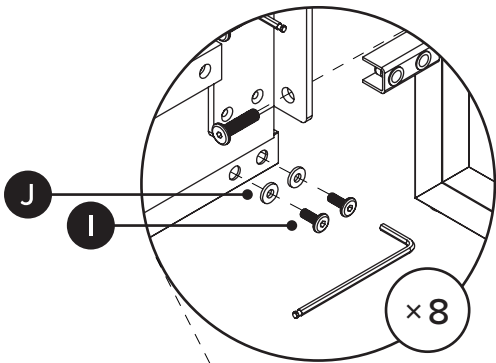
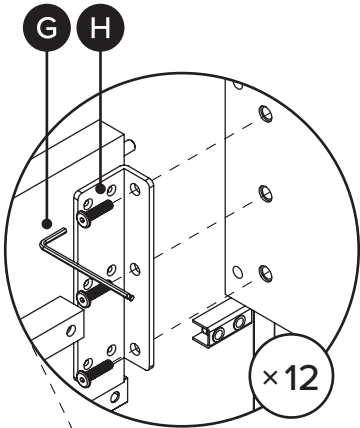


2

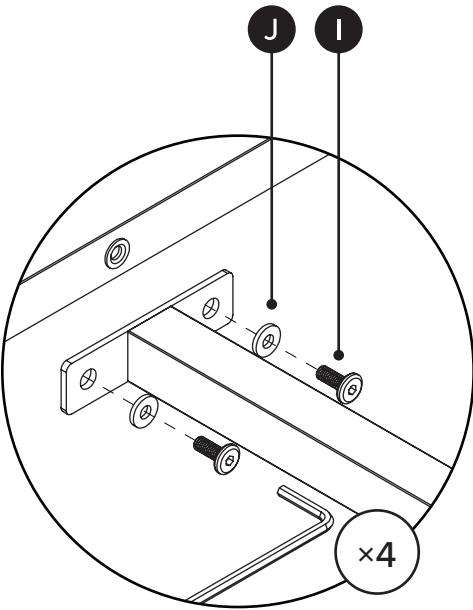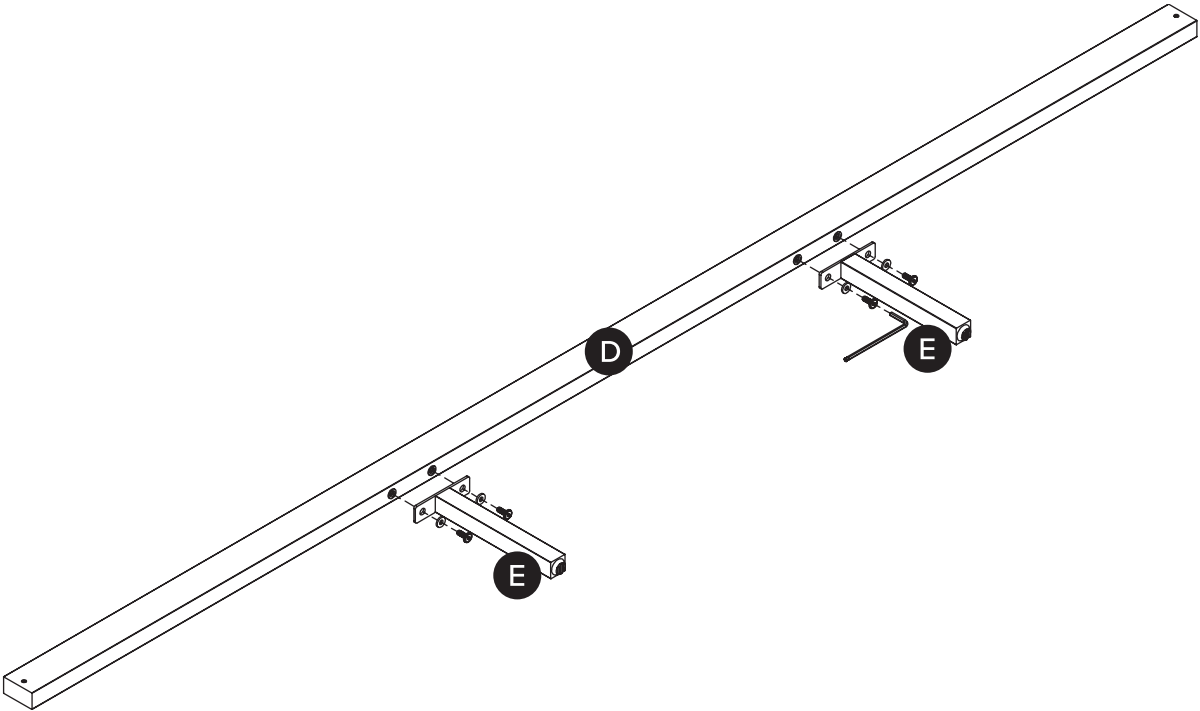

3

! Legs (E) adjust levelers 2mm to 3mm as needed to avoid squeaking noise.

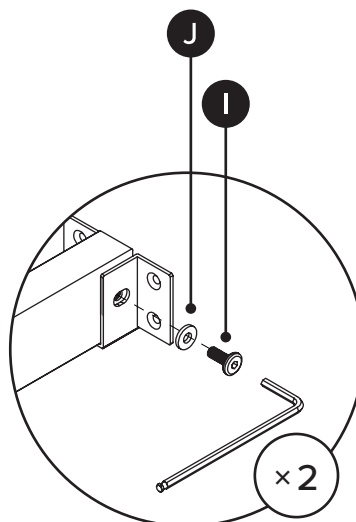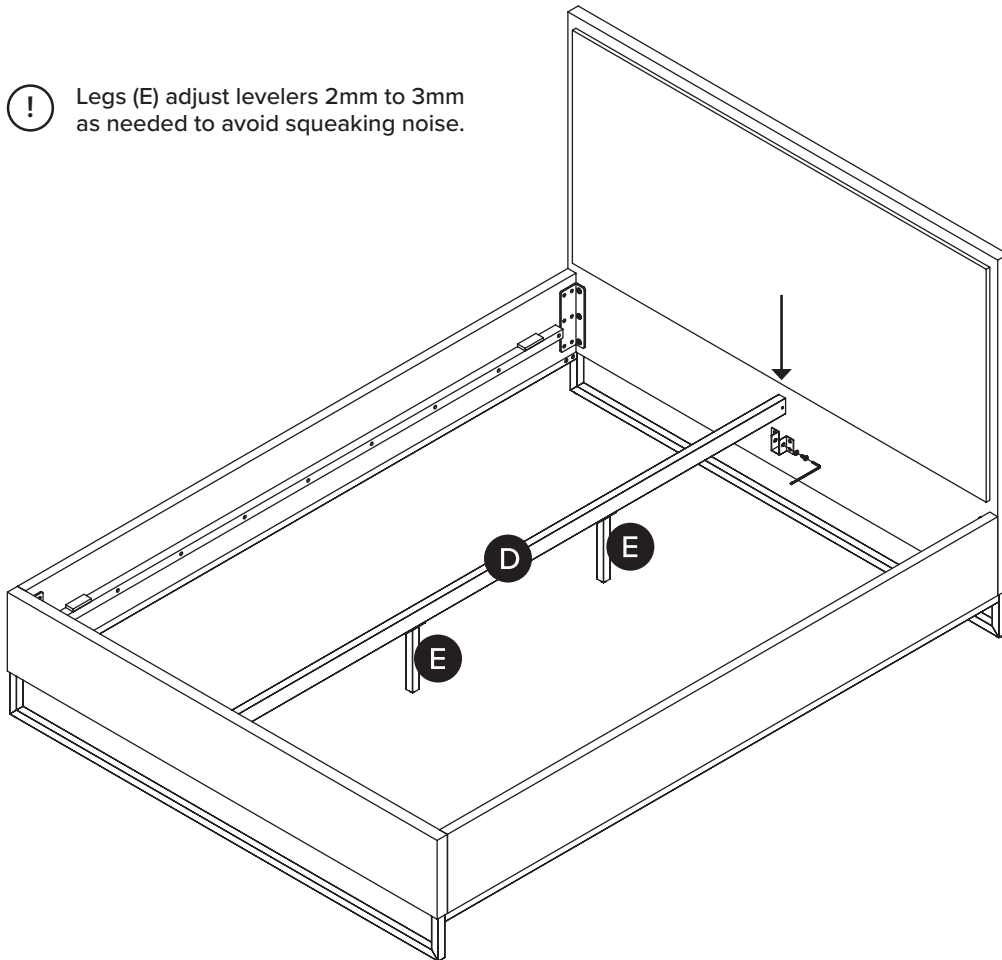

5

