


ARTICLE.

VERSION 1.0

Assembly Instructions

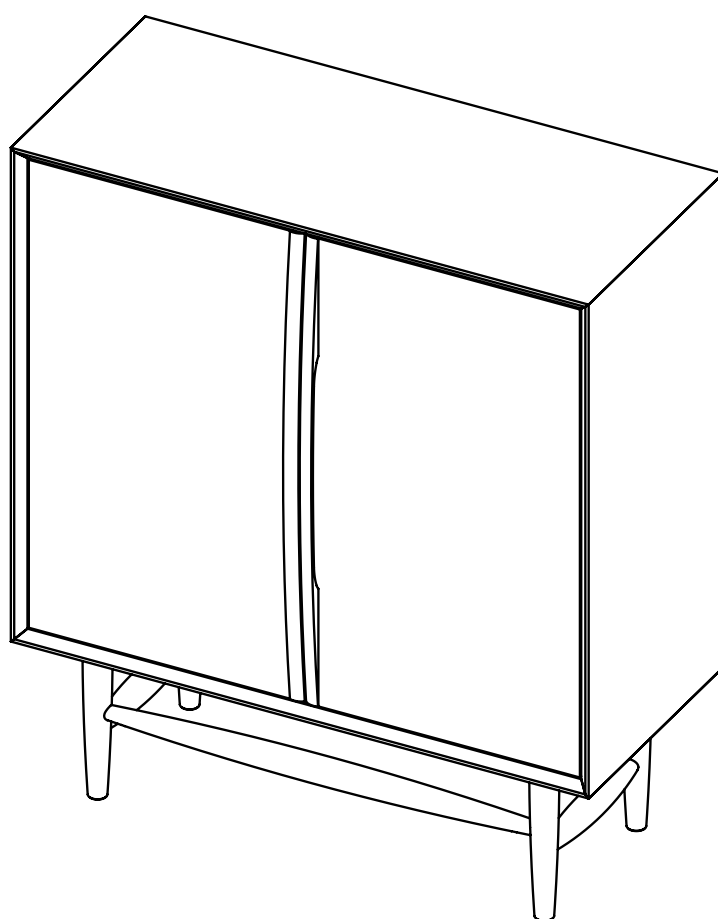

LENIA


Cabinet

ASSEMBLY INSTRUCTIONS

Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.

When assembling, place all parts on a soft, clean, and flat surface such as a carpet to prevent scratches.



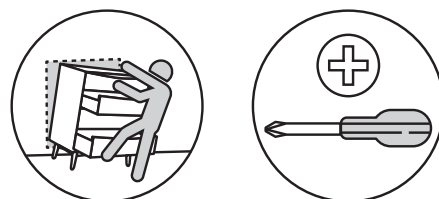






If you're having difficulty, our friendly Customer Care team is always here to help. Call us at **1.888.746.3455** during business hours, email service@article.com or chat live at article.com.








ANTI-TIP
Installation Required


REQUIRED TOOL

! Hardware (C/D) to attach brackets to wall is designed for drywall. To attach this unit to another type of wall, consult with your local hardware store.


PARTS INVENTORY		
ID	DESCRIPTION	QTY
A	CABINET FRAME	1
B	LEFT LEG	1
C	RIGHT LEG	1
D	SUPPORT BAR	1
E	CAM LOCK NUTS 	2
F	CAM LOCK BOLTS 	2
G	ALLEN KEY 	1
H	M8 × 20MM BOLT 	8
I	BLOCK WASHER M8 	8
J	WASHER M8 	8
K	M8 × 30MM BOLT 	4
L	FELT PAD 	4
M	LEG BRACKET 	2

PARTS INVENTORY CONT.		
ID	DESCRIPTION	QTY
A	BRACKET 	4
B	M4 × 20MM SCREW 	4
C	M8 × 51MM PLUG 	4
D	M6 × 70MM SCREW 	4
E	STRAP 	2


1

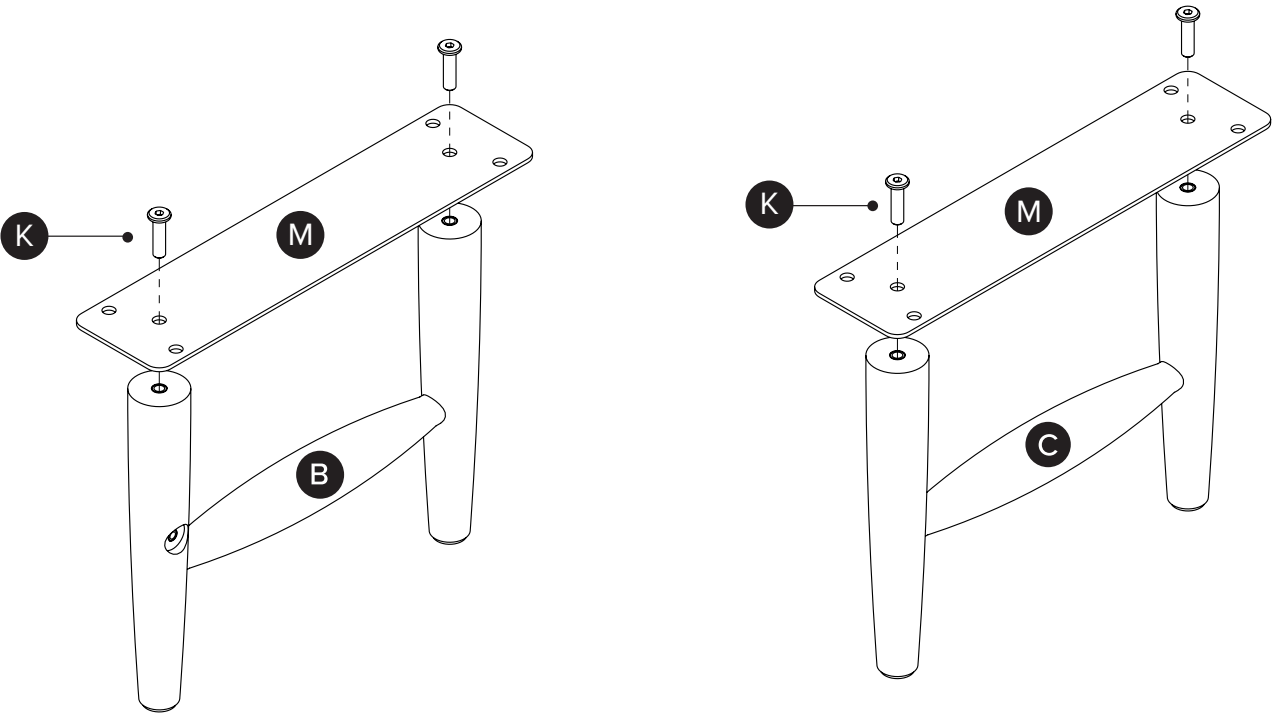


2

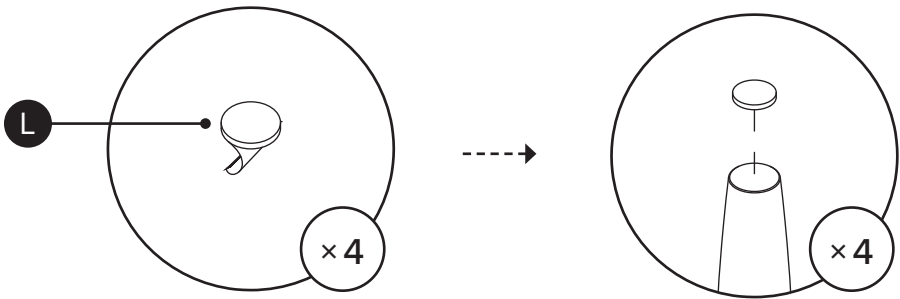


3

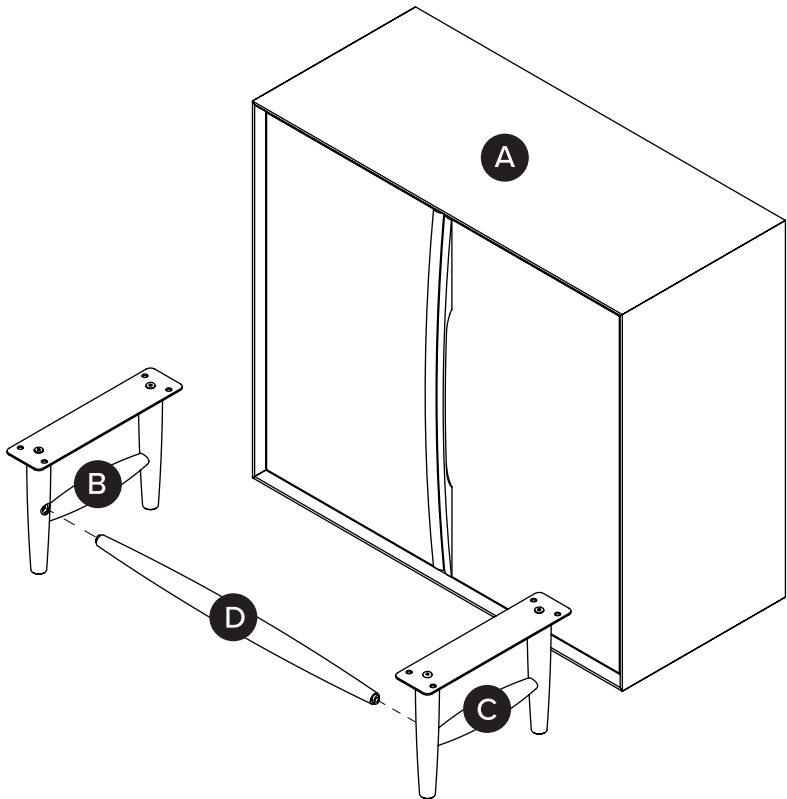



4

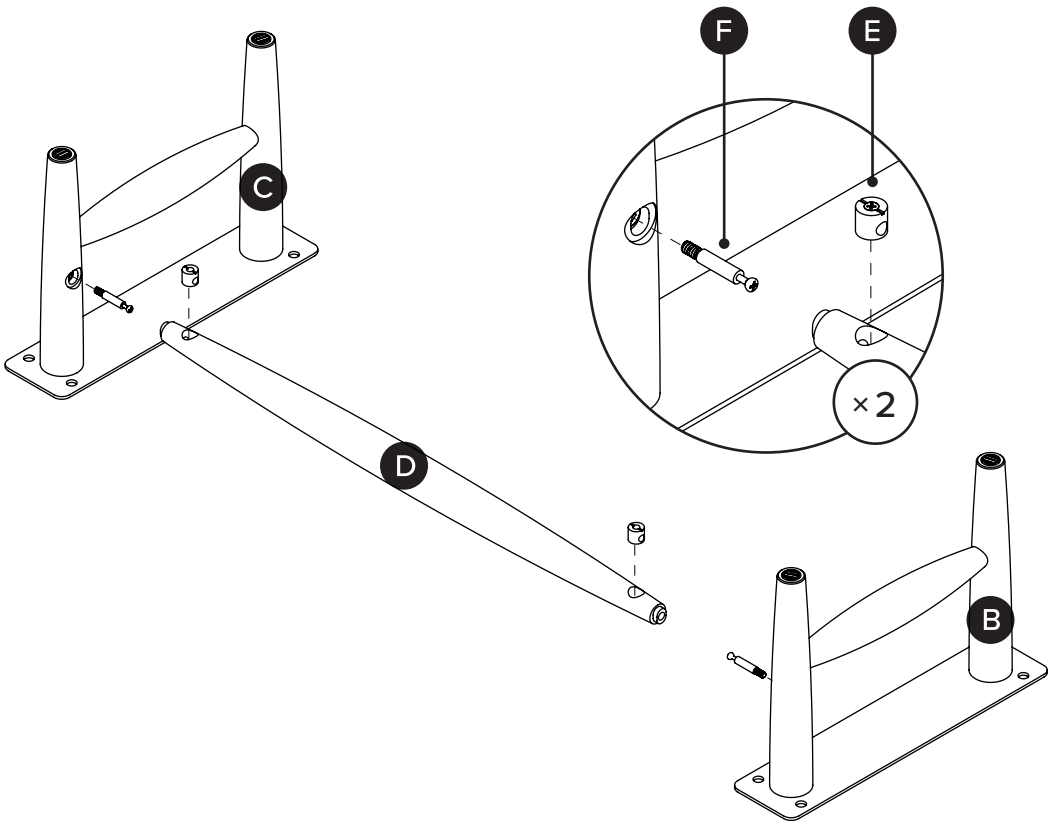

5 _____

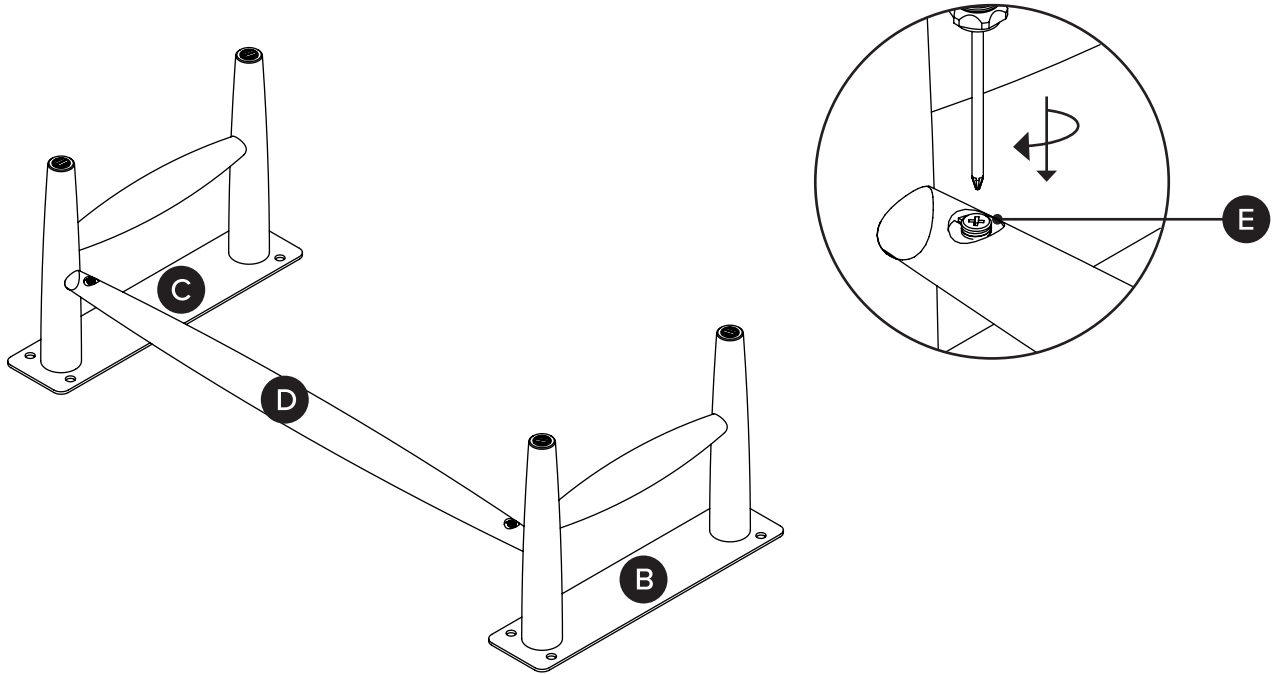


6 _____

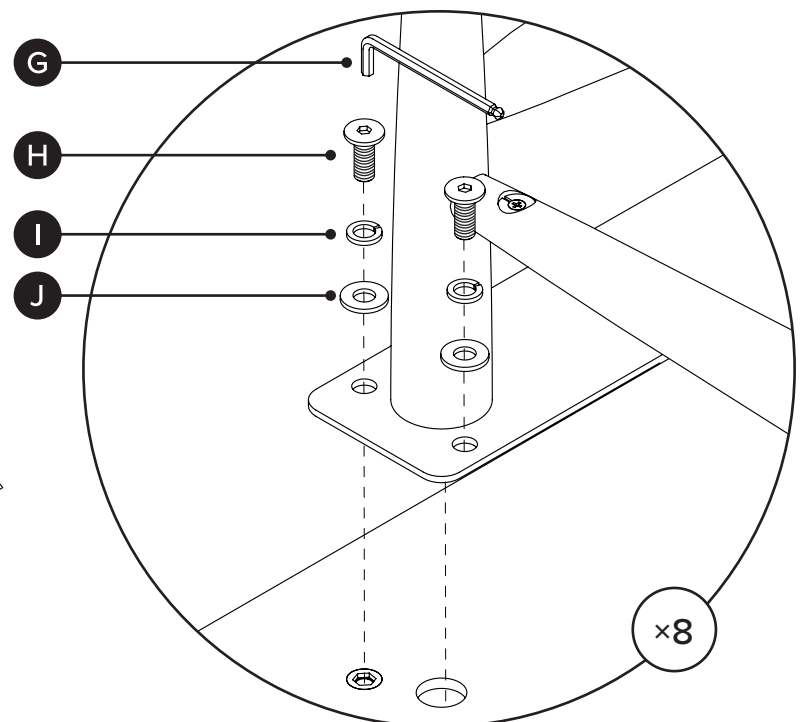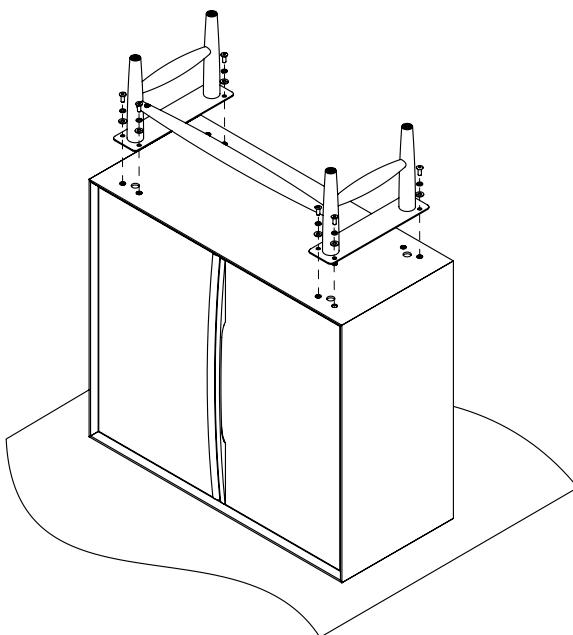


Crossbar is situated at the front side of the cabinet.

7

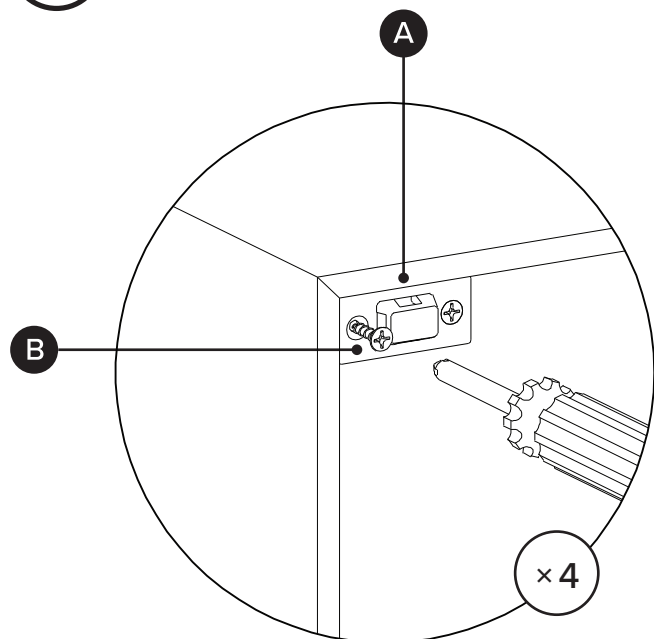


Attach pair of brackets to top corners of the back of the unit. Note there are no existing pilot holes on the product.

8


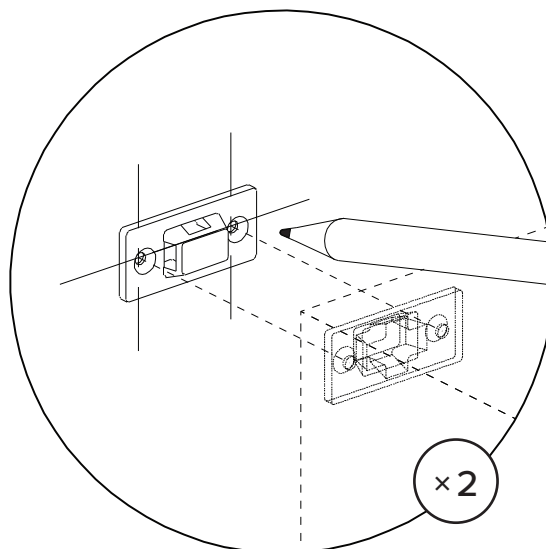


Mark on wall where second pair of brackets should be placed.

9

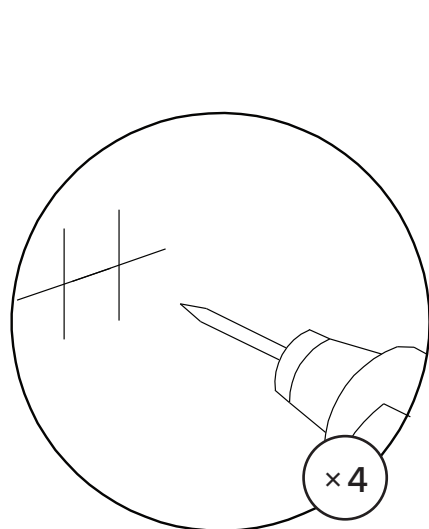


Drill holes in wall using 8mm / 5/16" drill bit.

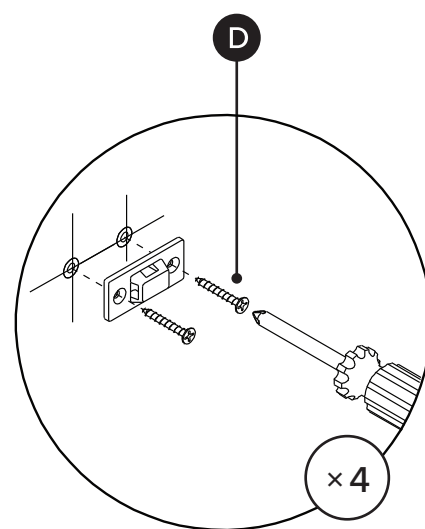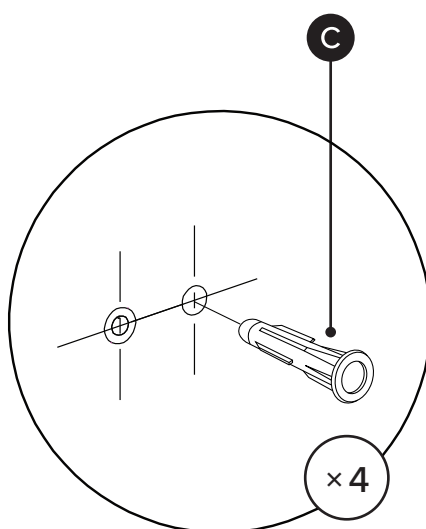


10A

Align brackets on unit
with brackets on wall.

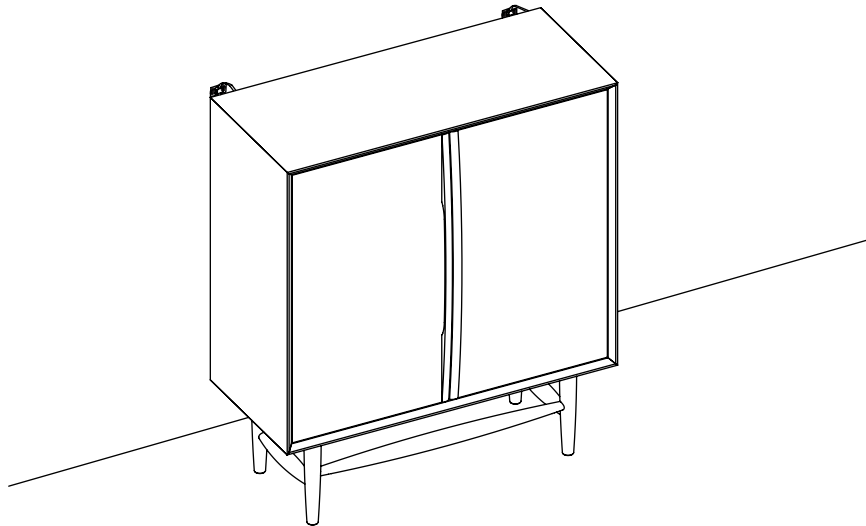

10B

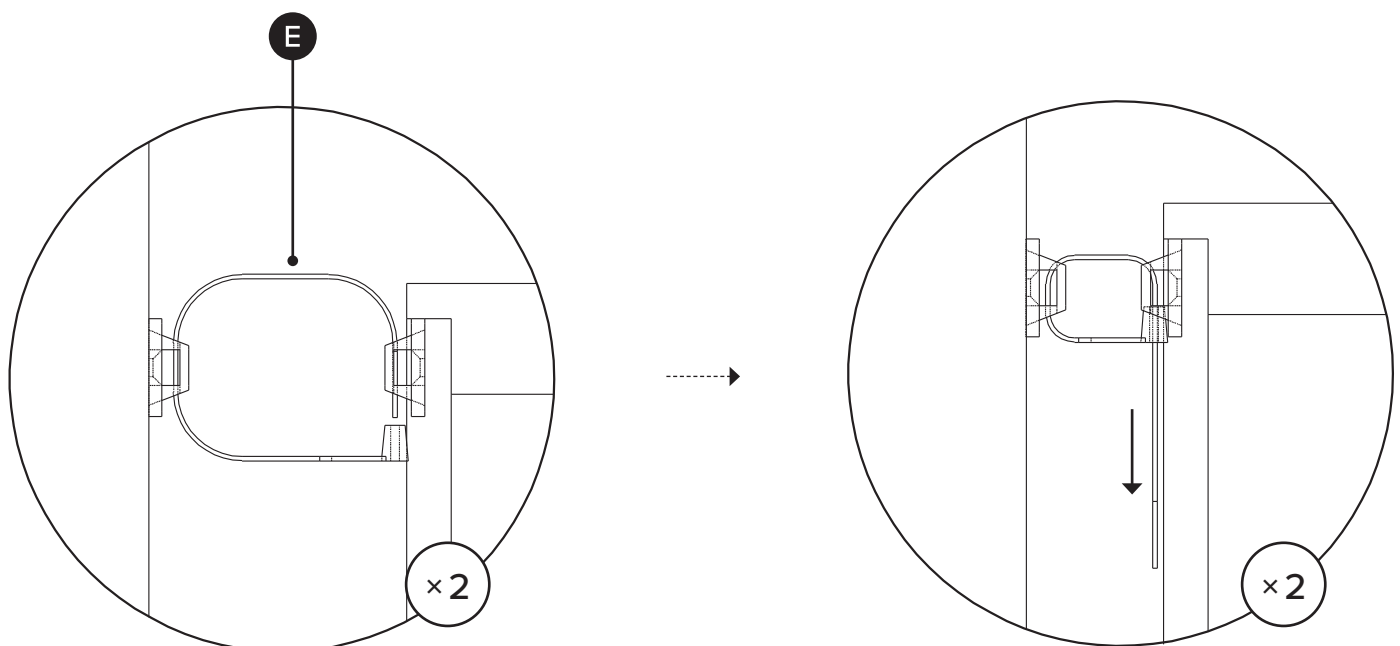


Pull strap down until it snap-locks.

DOOR ADJUSTMENT INSTRUCTIONS





During shipping, the doors of your cabinet may have shifted slightly. This can easily be corrected by tightening a few screws. Always start by adjusting the top hinge on the affected door.



REQUIRED TOOL

1A

If the door needs adjustment side to side:

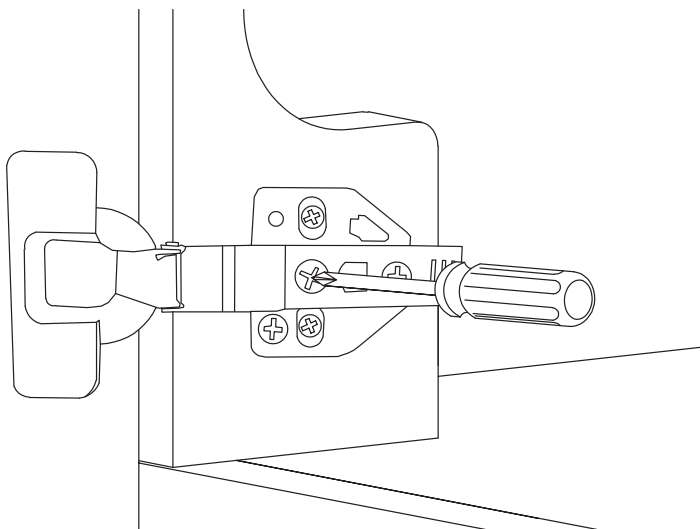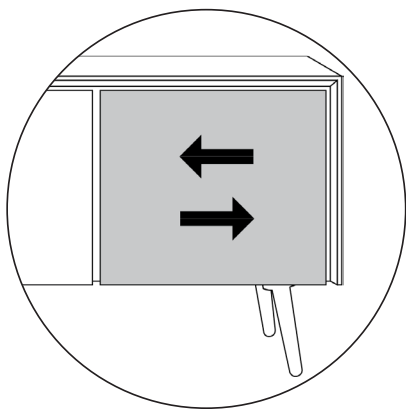

1B

If the door needs adjustment forward or backward:

