ARTICLE.

VERSION 1.1

Assembly Instructions

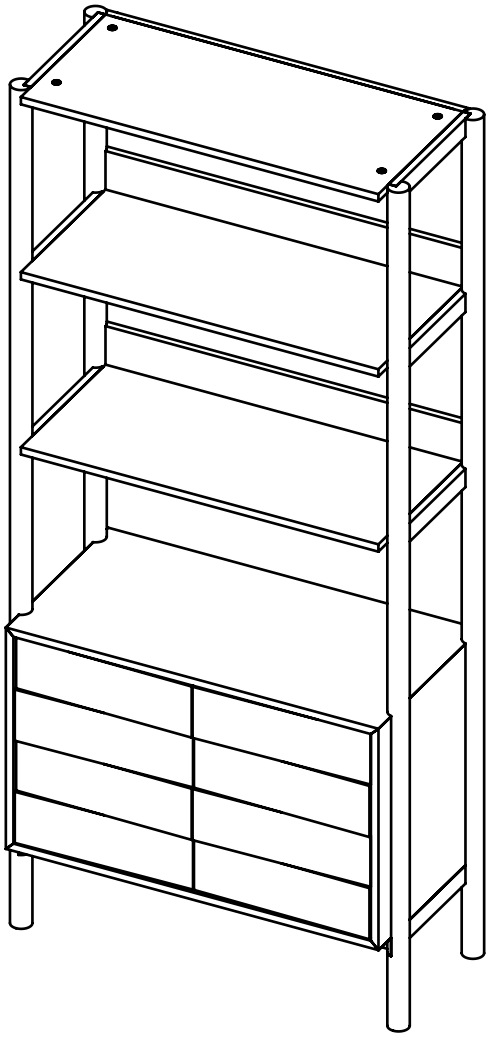

MERTO

Bookcase

ASSEMBLY INSTRUCTIONS

Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.

When assembling, place all parts on a soft, clean, and flat surface such as a carpet to prevent scratches.

If you're having difficulty, our friendly Customer Care team is always here to help. Call us at **1.888.746.3455** during business hours, email **service@article.com** or chat live at **article.com**.

TIME

OF PEOPLE



DIFFICULTY



REQUIRED TOOL



REQUIRED TOOL

PARTS INVENTORY			
ID	DESCRIPTION		QTY
A	CABINET		1
B	TOP PANEL		1
C	FIXED SHELF		2
D	CABINET SHELF		1
E	LEG LEFT		1
F	LEG RIGHT		1
G	WOODEN DOWEL		12
H	CAMLOCK NUT		12

PARTS INVENTORY CONT.			
ID	DESCRIPTION		QTY
I	CAM LOCK SCREW		12
J	M6 x 30MM BOLT		8
K	LOCK WASHER		12
L	WASHER		12
M	M6 x 15MM BOLT		4
N	ALLEN KEY		1
O	LATCH		2

1

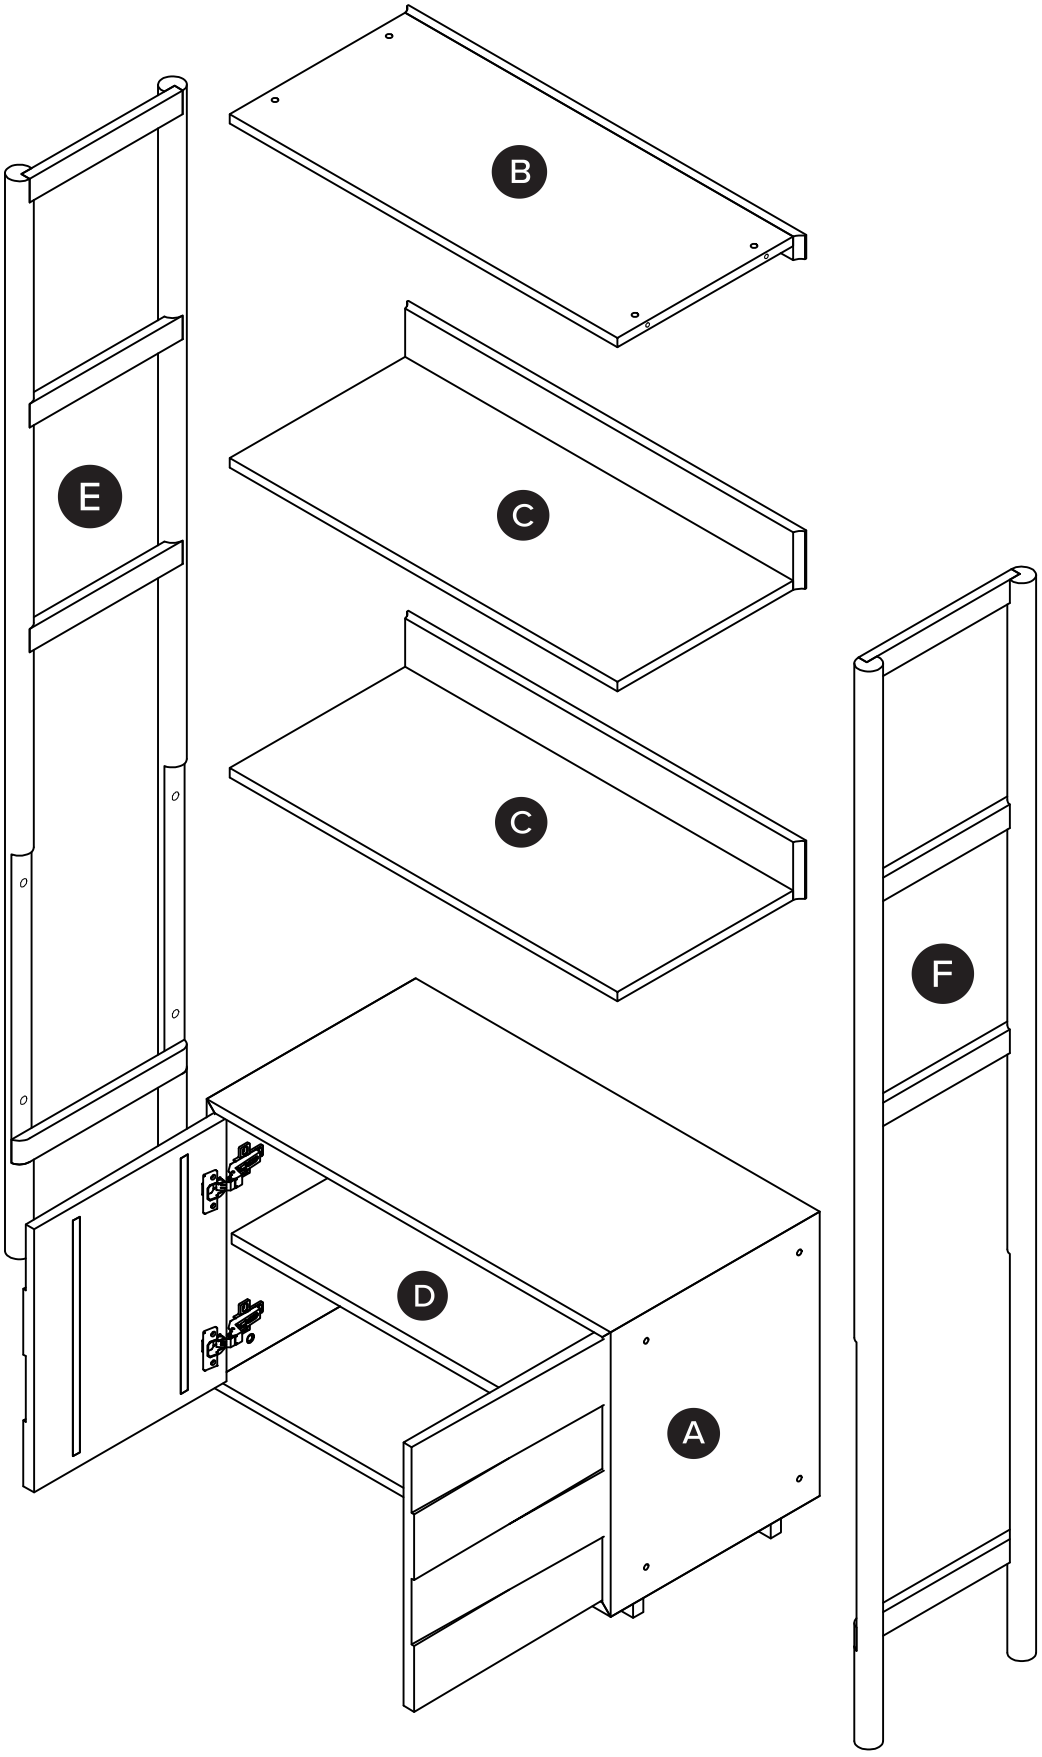

2

! Insert the latches (O) from the hardware bag

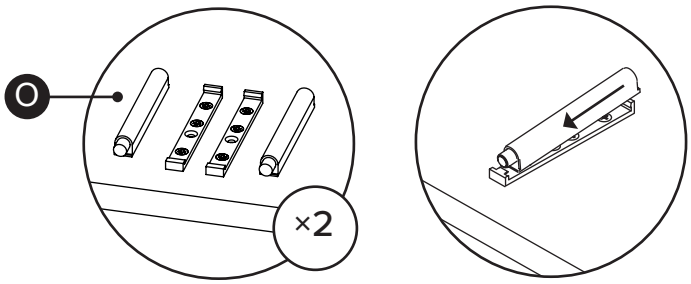

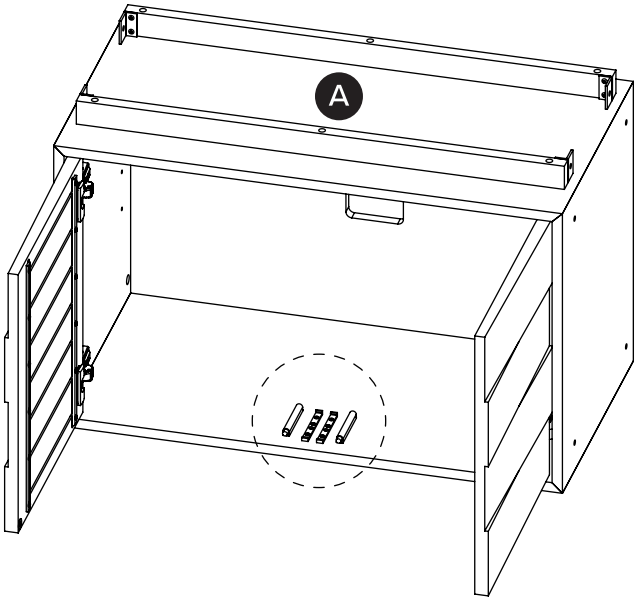

3A

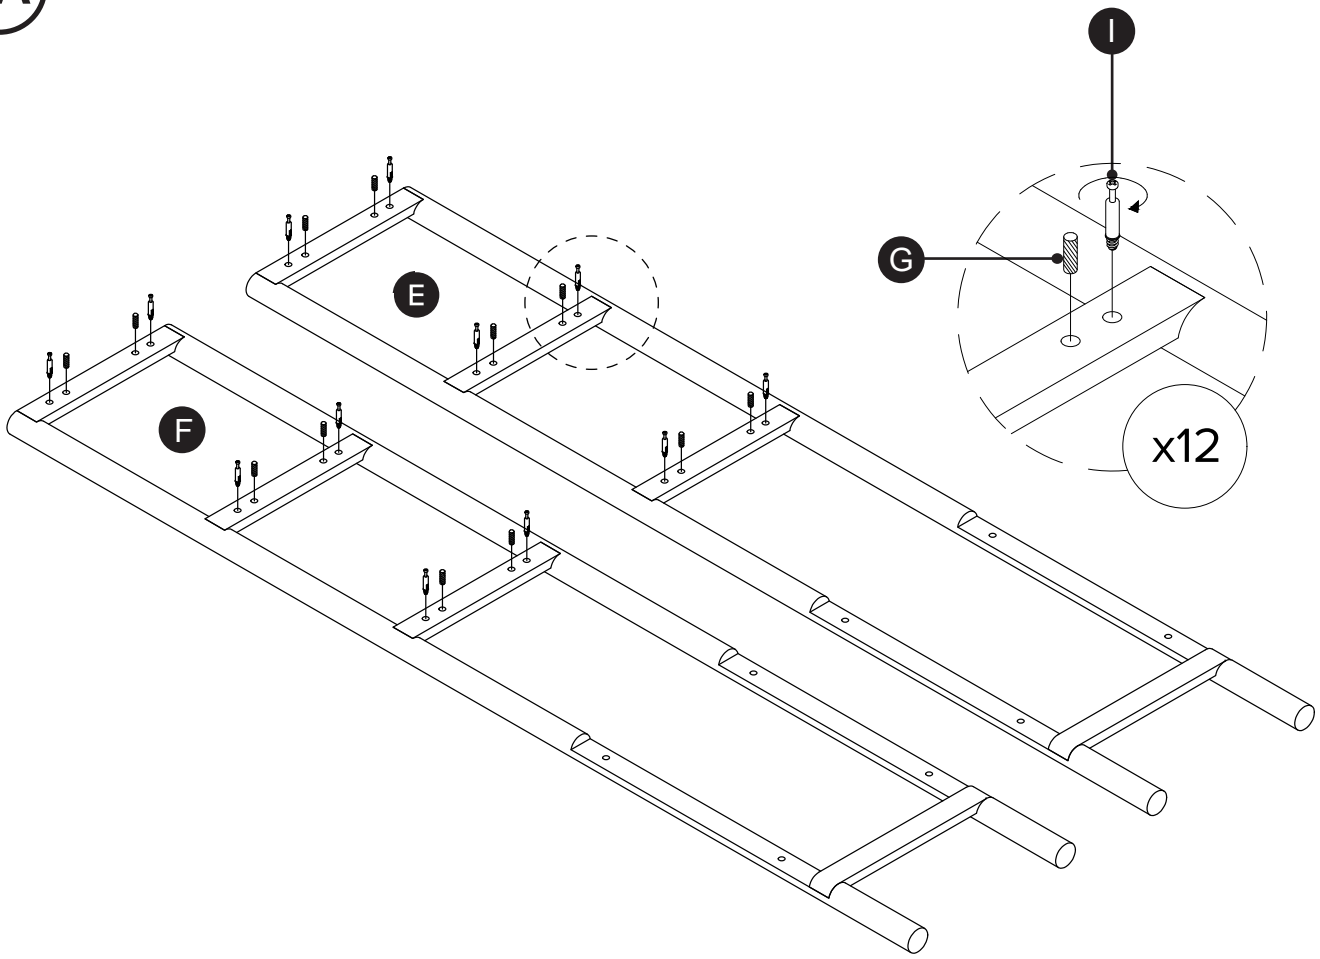

3B

! Fixed shelf (C) assembly:





Camlock nut (H) is screwed from the bottom.

! Top panel (B) assembly:



Camlock nut (H) is screwed from the top.

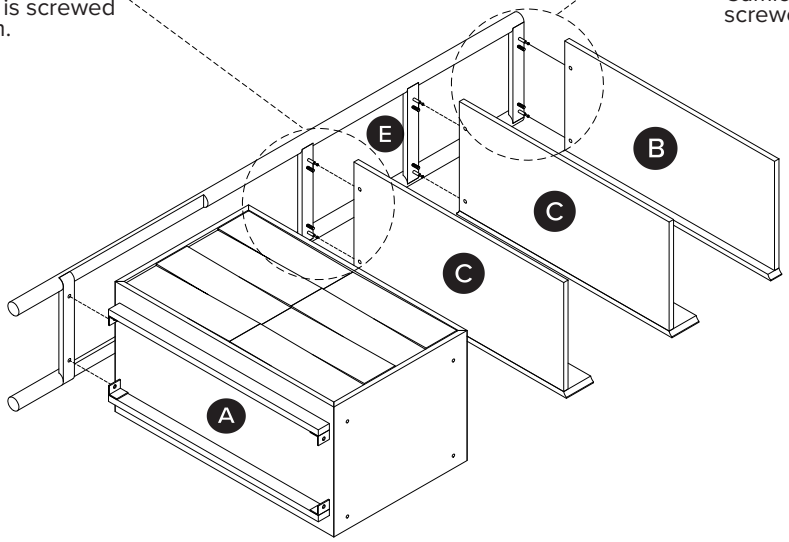

4

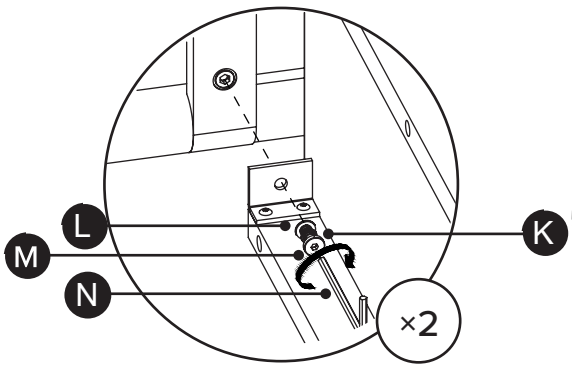

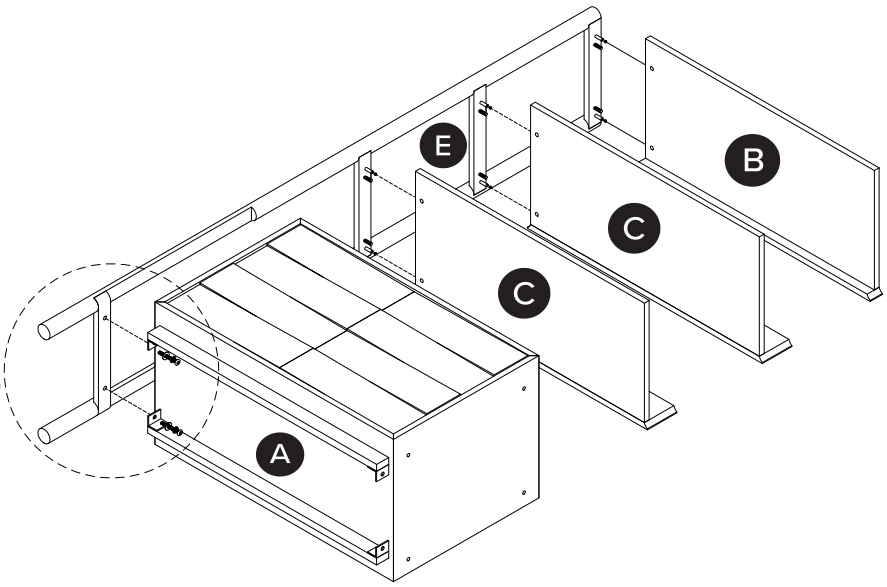

5

! Top panel (B) assembly:



Camlock nut (H) is screwed from the top.

! Fixed shelf (C) assembly:





Camlock nut (H) is screwed from the bottom.

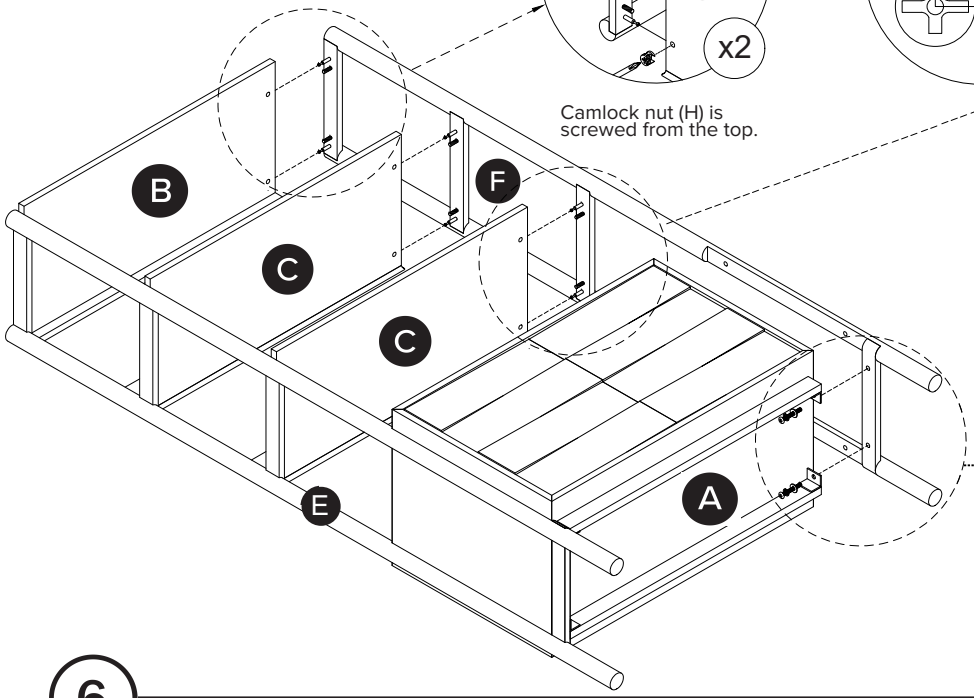

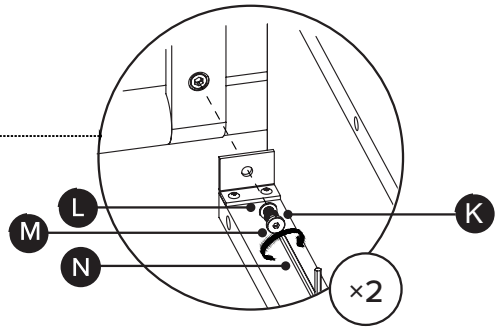

6

! CAUTION!

Please take care when lifting, this unit is heavy! Do not drag the unit when moving, must be lifted to prevent damaging the legs!

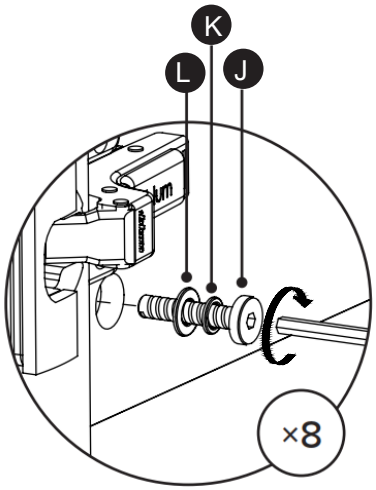

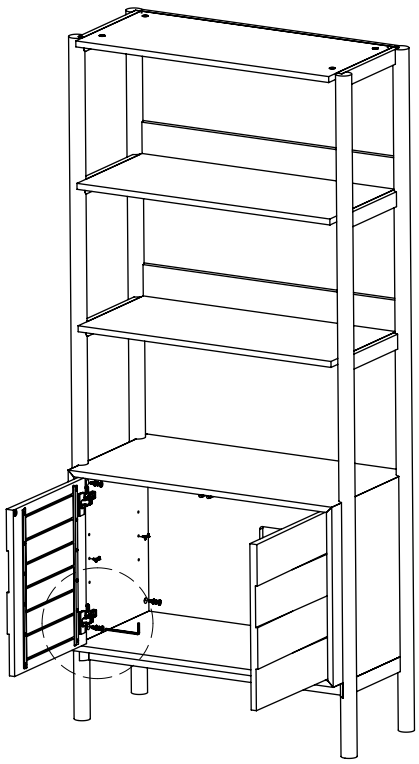

7





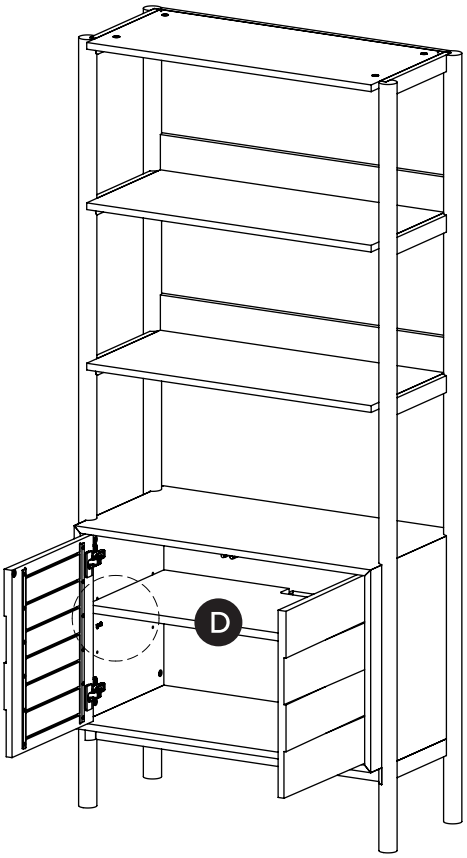

! Adjust shelf pins to move the shelf up or down at the desired height.

8



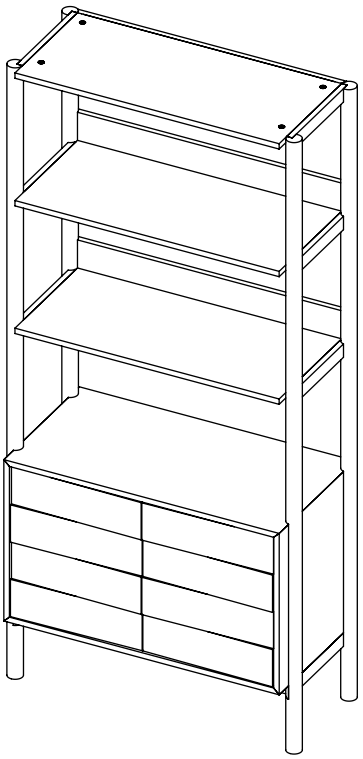

! Adjust levelers as needed.

DOOR ADJUSTMENT INSTRUCTIONS

! During shipping, the doors of your cabinet may have shifted slightly. This can easily be corrected by tightening a few screws. Always start by adjusting the top hinge on the affected door.



REQUIRED TOOL

9A

! When the push-to-open function of the doors may not operate as usual, rotate the latch tips longer to the front.

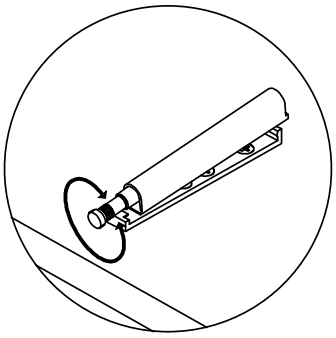

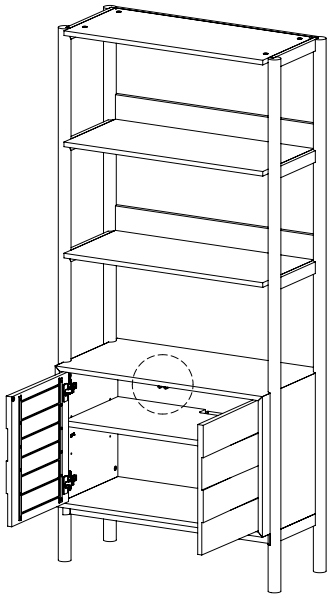

9B

! If the door is crooked, adjust hinge(s) up or down:

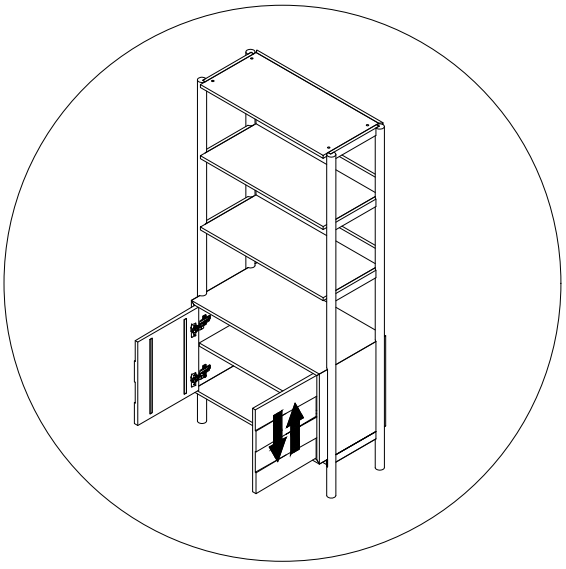

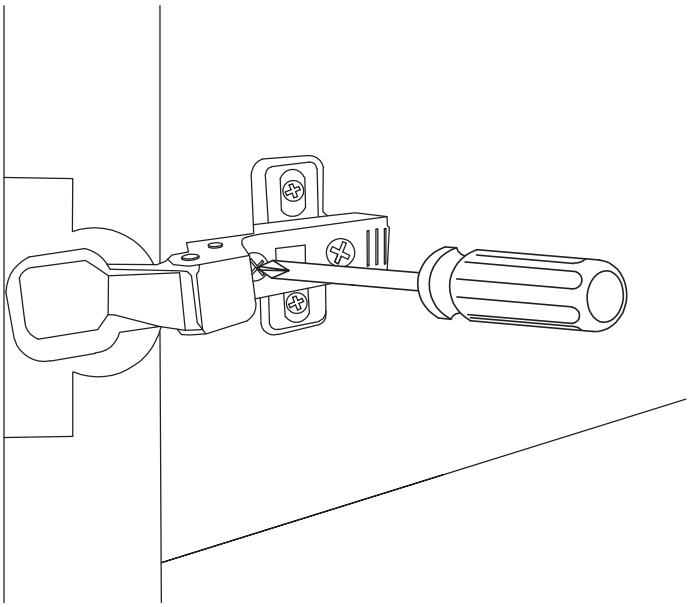

9C

! If the door needs adjustment side to side:

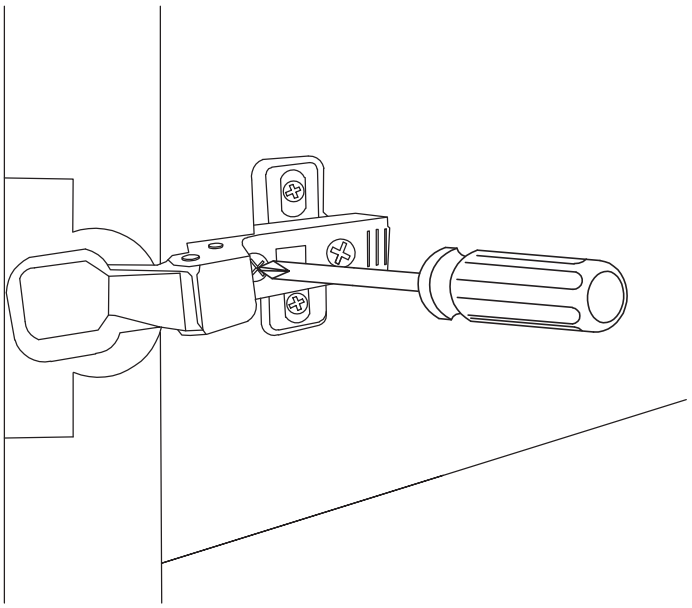

9D

! If the door needs adjustment forward or backward:

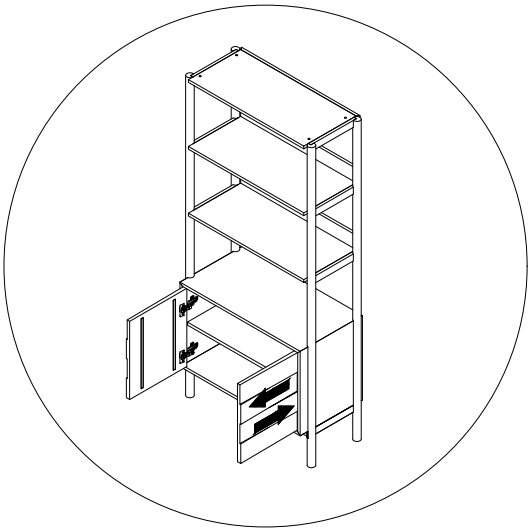

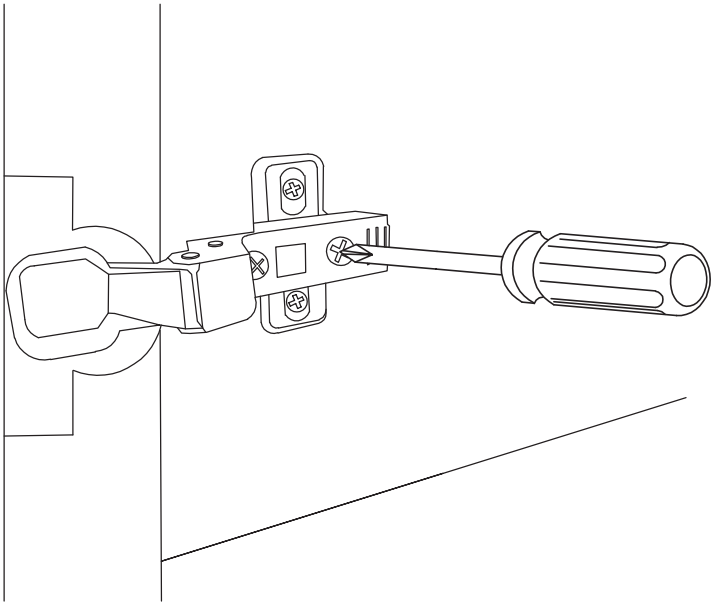

ANTI-TIP RESTRAINT INSTALLATION

⚠ WARNING!

Serious or fatal crushing injuries can occur from furniture tip-over. To help prevent tip-over:

- Install tip-over restraint provided.
- Do not set heavy objects on top of this product, unless the product is specifically designed to accomodate them.
- Never allow children to climb or hang on mirrors, shelves, consoles, or cabinets with doors and/or drawers.

Use of tip-over restraints may only reduce but not eliminate, the risk of tip-over.



TIME

OF PEOPLE



DIFFICULTY



REQUIRED TOOL



REQUIRED TOOL

PARTS INVENTORY			
ID	DESCRIPTION		QTY
P	BRACKET		2
Q	M4 × 15MM SCREW		2
R	M8 × 51MM PLUG		2
S	M6 × 70MM SCREW		2
T	WASHER		2

!

Hardware (R/S) to attach brackets to wall is designed for drywall. To attach this unit to another type of wall, consult with your local hardware store.

1

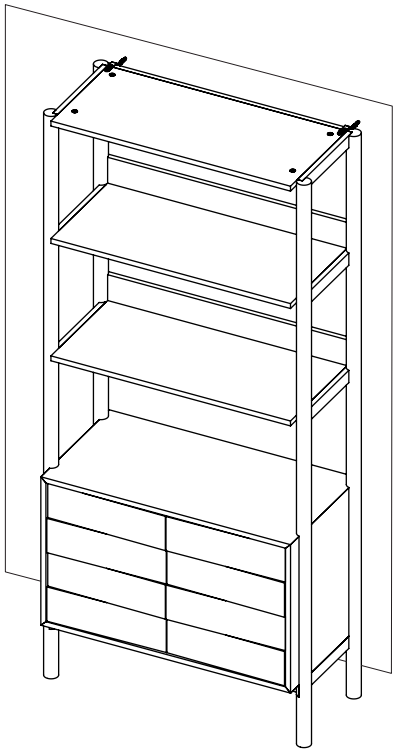

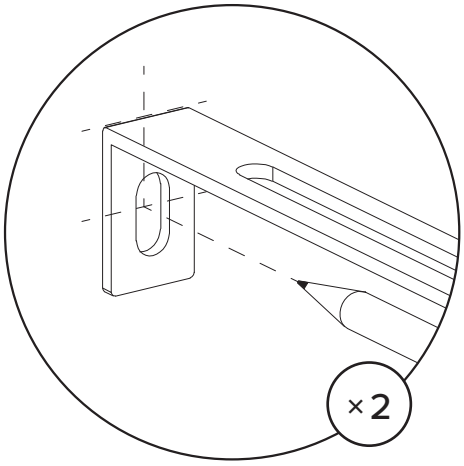

Place unit in desired location and mark on wall where holes should be drilled.

2
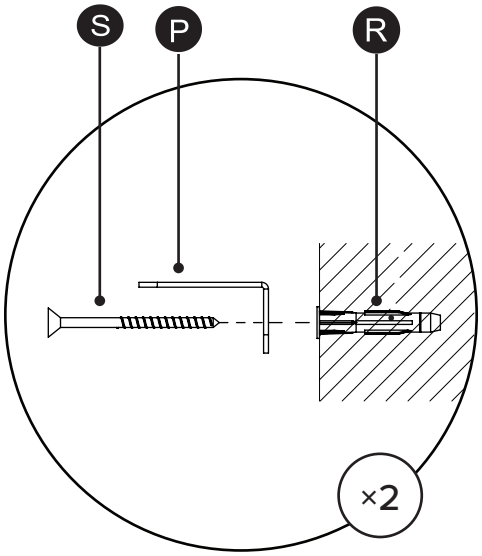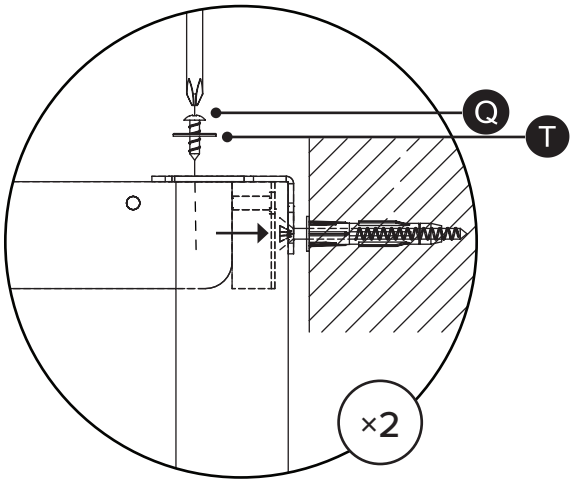
Drill holes into drywall, and attach unit to wall with appropriate hardware.