


ARTICLE.

VERSION 1

Assembly Instructions

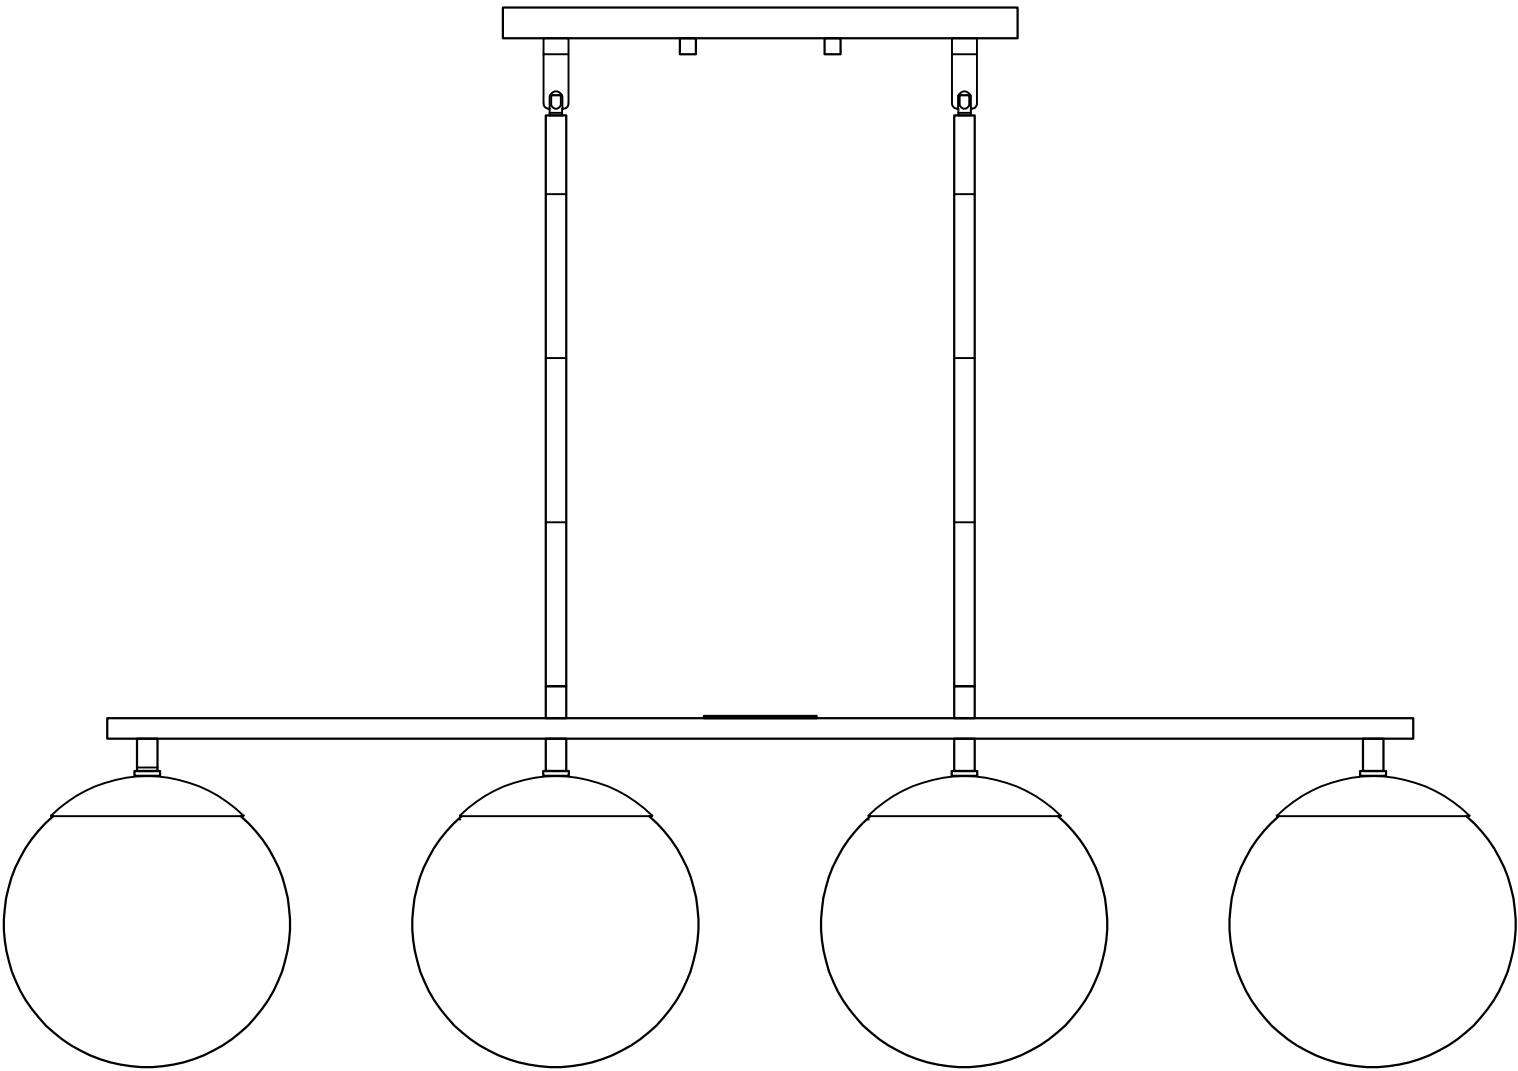

MOON

Chandelier

ASSEMBLY INSTRUCTIONS












Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.


When assembling, place all parts on a soft, clean, and flat surface such as a carpet to prevent scratches.

If you're having difficulty, our friendly Customer Care team is always here to help. Call us at 1.888.746.3455 during business hours, email [service@article.com](mailto:service@article.com) or chat live at [article.com](https://www.article.com).

!

Consultation with a professional electrician is recommended for the installation of this pendant.


PARTS INVENTORY			
ID	DESCRIPTION		QTY
A	WIRE NUT		3
B	MOUNTING SCREWS 8/32x25mm		2
C	MOUNTING BRACKET IRON ROUND		1
D	SHORT GREEN SCREW 8/32x8mm (PRE-INSTALLED)		1
E	KNOB MOUNTING BRACKET IRON ROUND		2
F	SWIVEL		2
G	HEXNUT 1/8-27,H=5mm		2
H	WASHER ø32, Thick=1mm		2
I	CANOPY		1
J	TUBE ø12.7x152		2
K	TUBE ø12.7x305		6




TIME







DIFFICULTY




# OF PEOPLE



REQUIRED TOOL

PARTS INVENTORY		
ID	DESCRIPTION	QTY
L	LAMP BODY 	1
M	BULBS E26 	4
N	GLASS SHADE 	4
O	WRENCH 	1


1

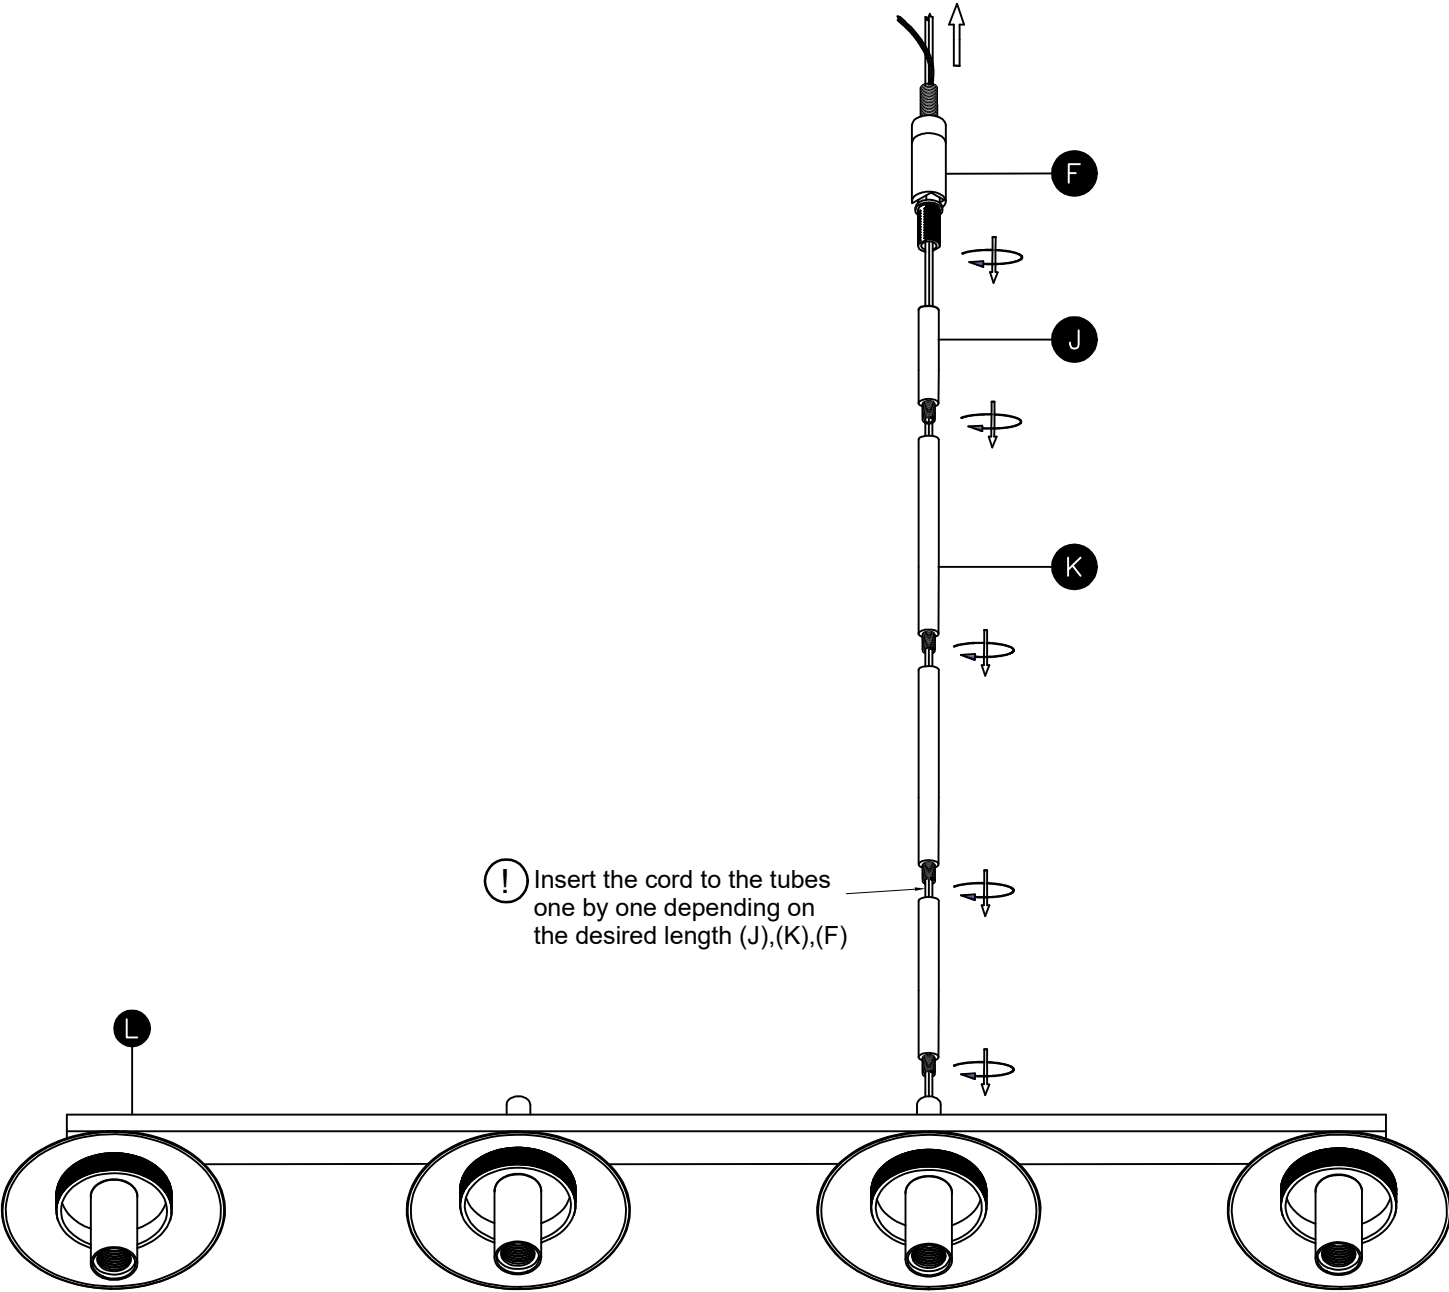

! Rotate the tube thread until all the segment are all attached to each other

2


Connect the other tubes together to the desired length.

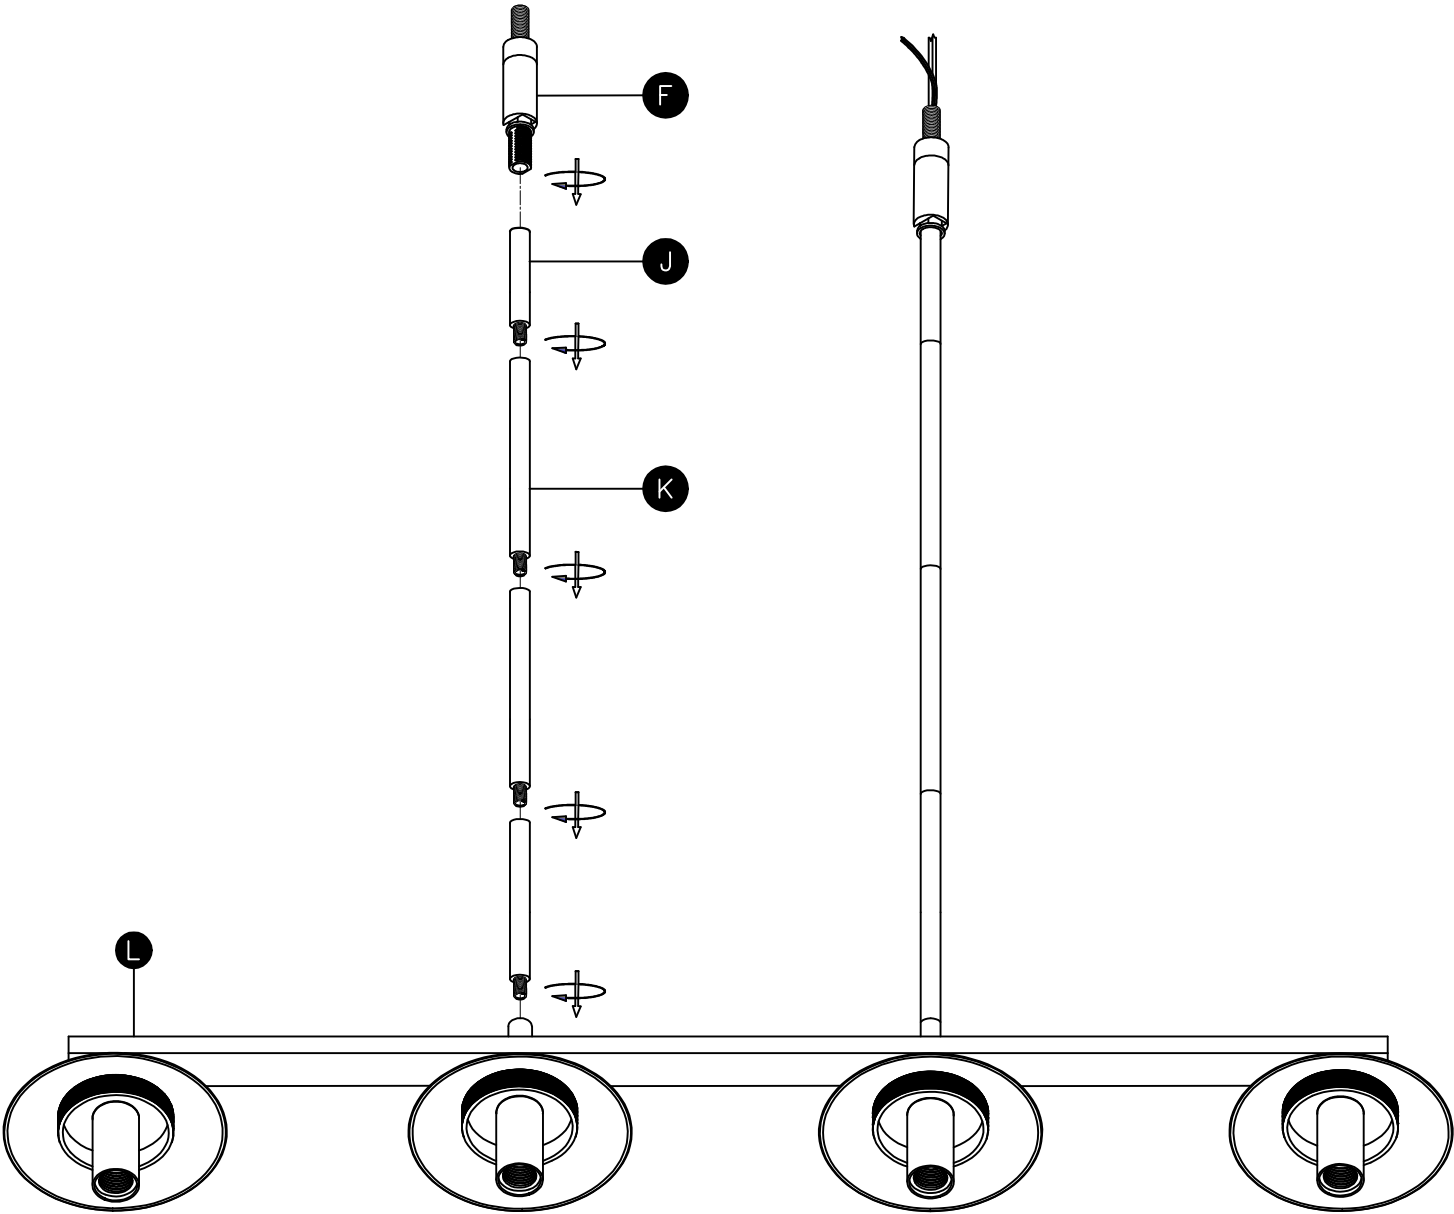

! Rotate the tube thread until all the segment are all attached to each other

3


! Use wrench (O) to tighten the hexnut (G)

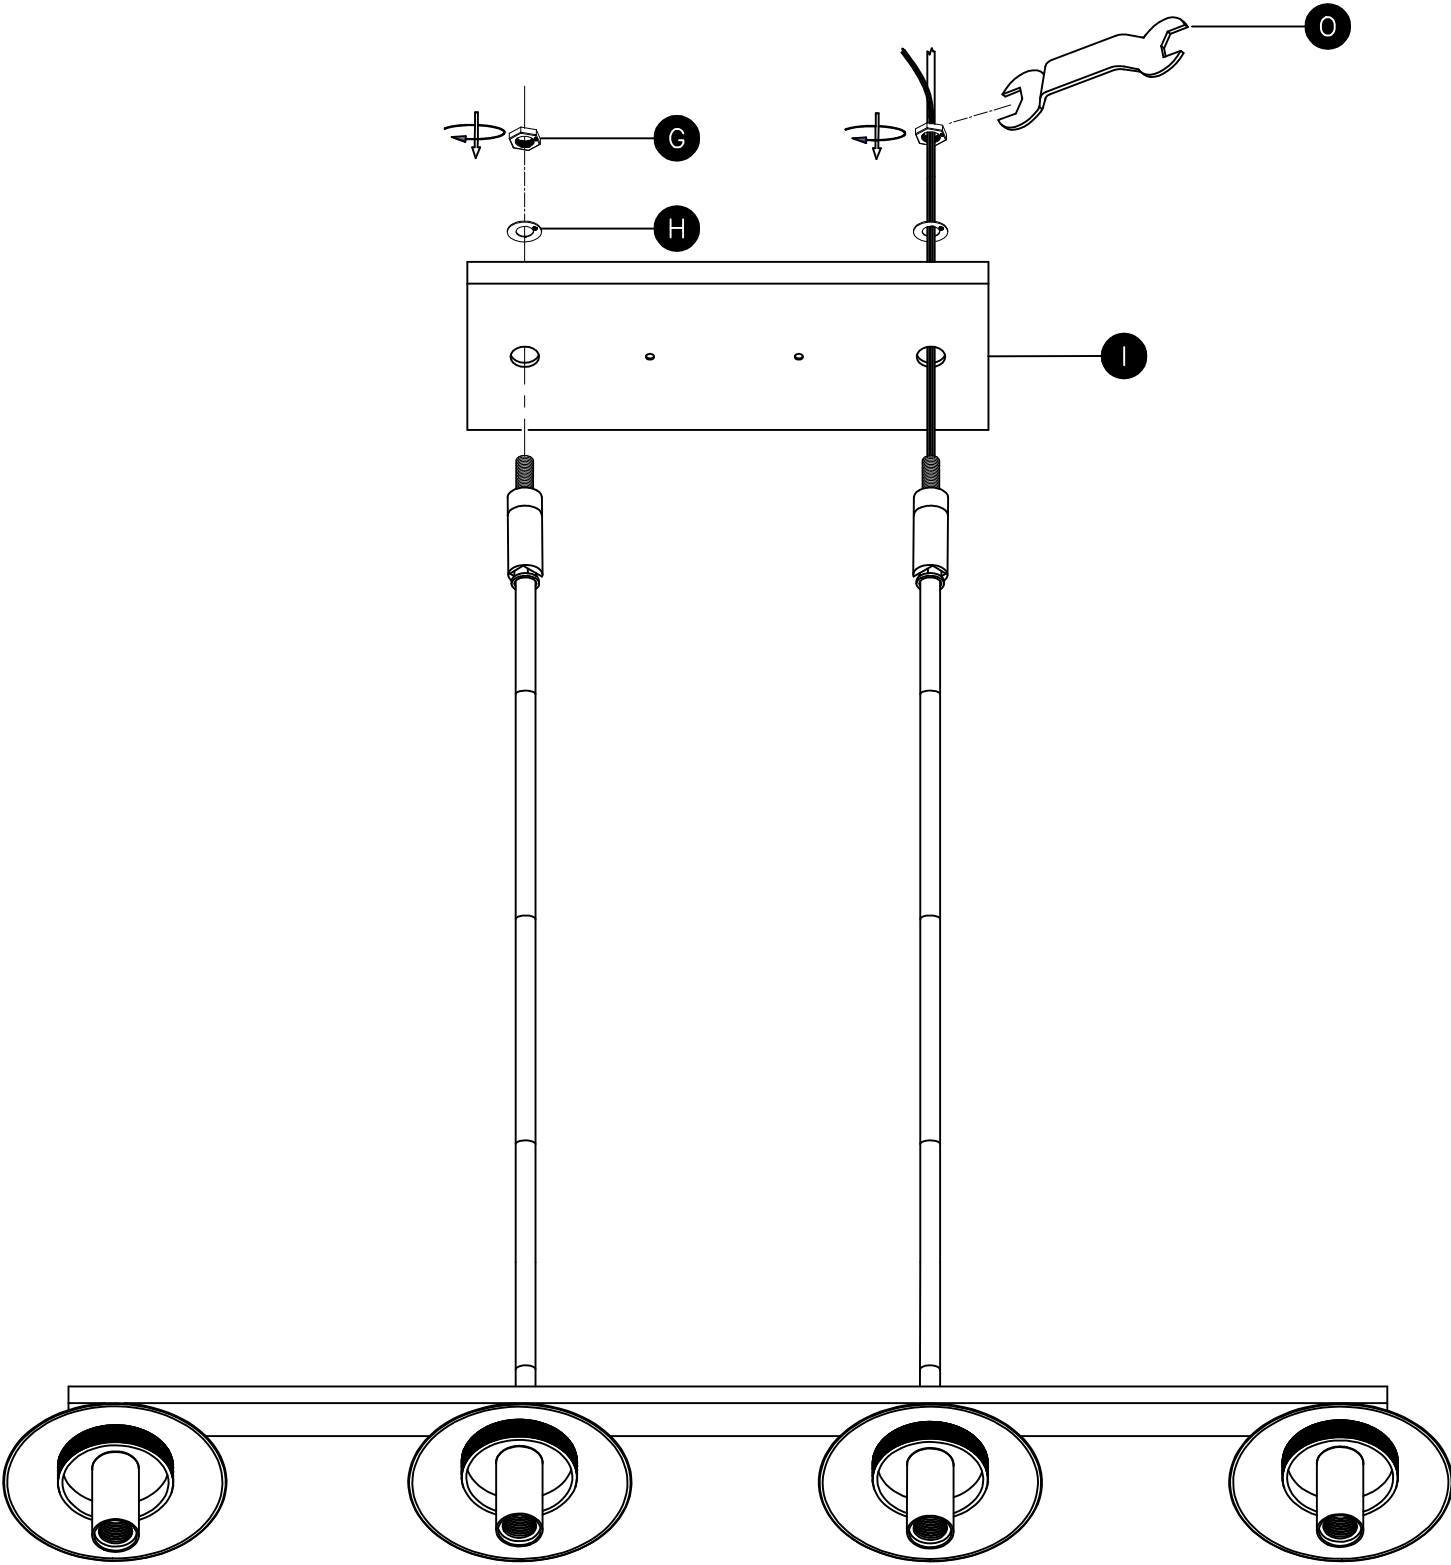

4

**CAUTION**


Turn off the power at the main circuit panel before starting the installation.

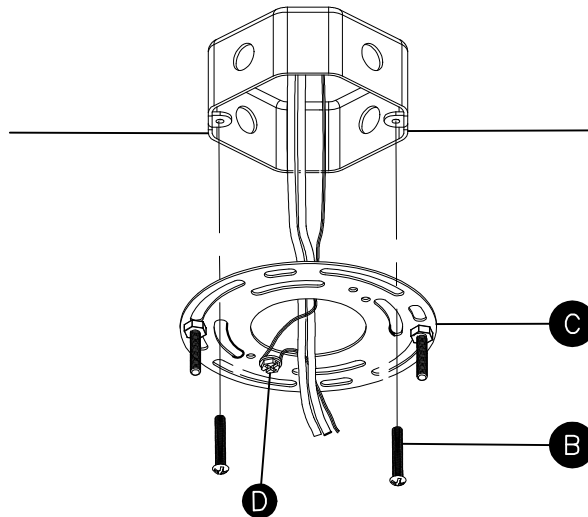

! Attach the mounting bracket iron round (C) to junction box.


5

- ! Match up wires by color and attach with wire nuts (A).  
 BLACK: Hot Fixture  
 WHITE: Neutral Fixture  
 GREEN OR BARE COPPER: Ground Wire

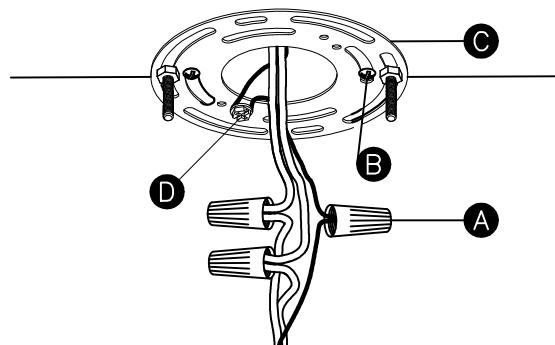


! If junction Box does not have a green ground wire, attach ground wire from lamp to short green screw (D) on mounting bracket.

6

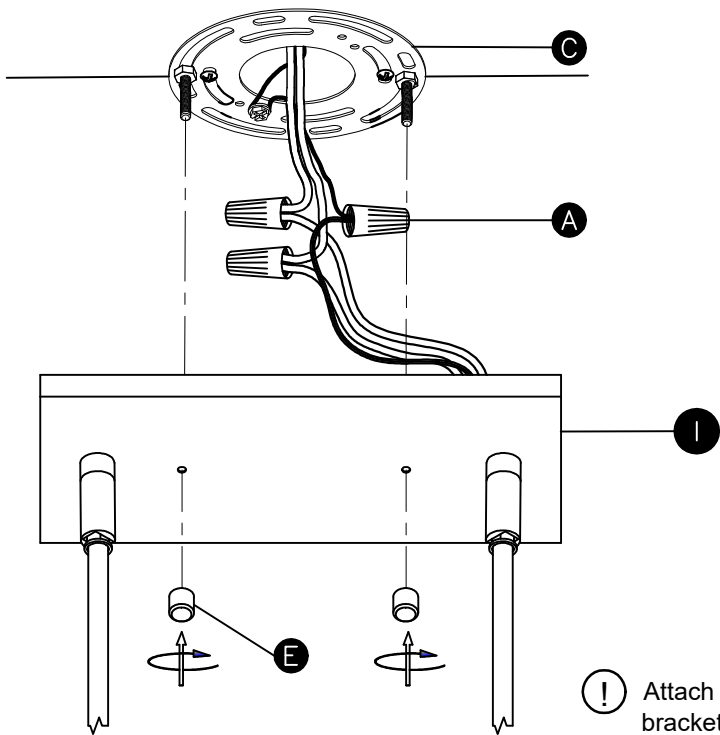


! Attach the canopy (I) with mounting bracket iron round (C) by knob(E). Make sure to screw tightly.

7

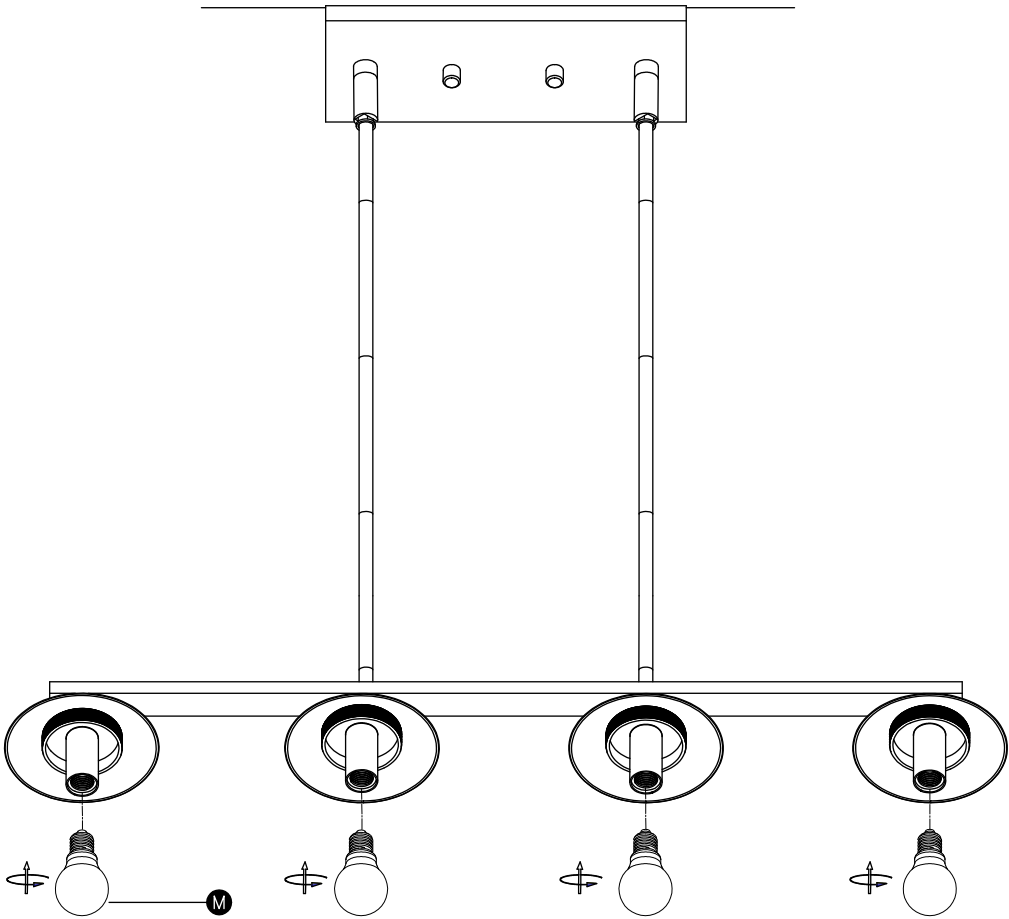

! Rotate Bulb(M) away arrow

8

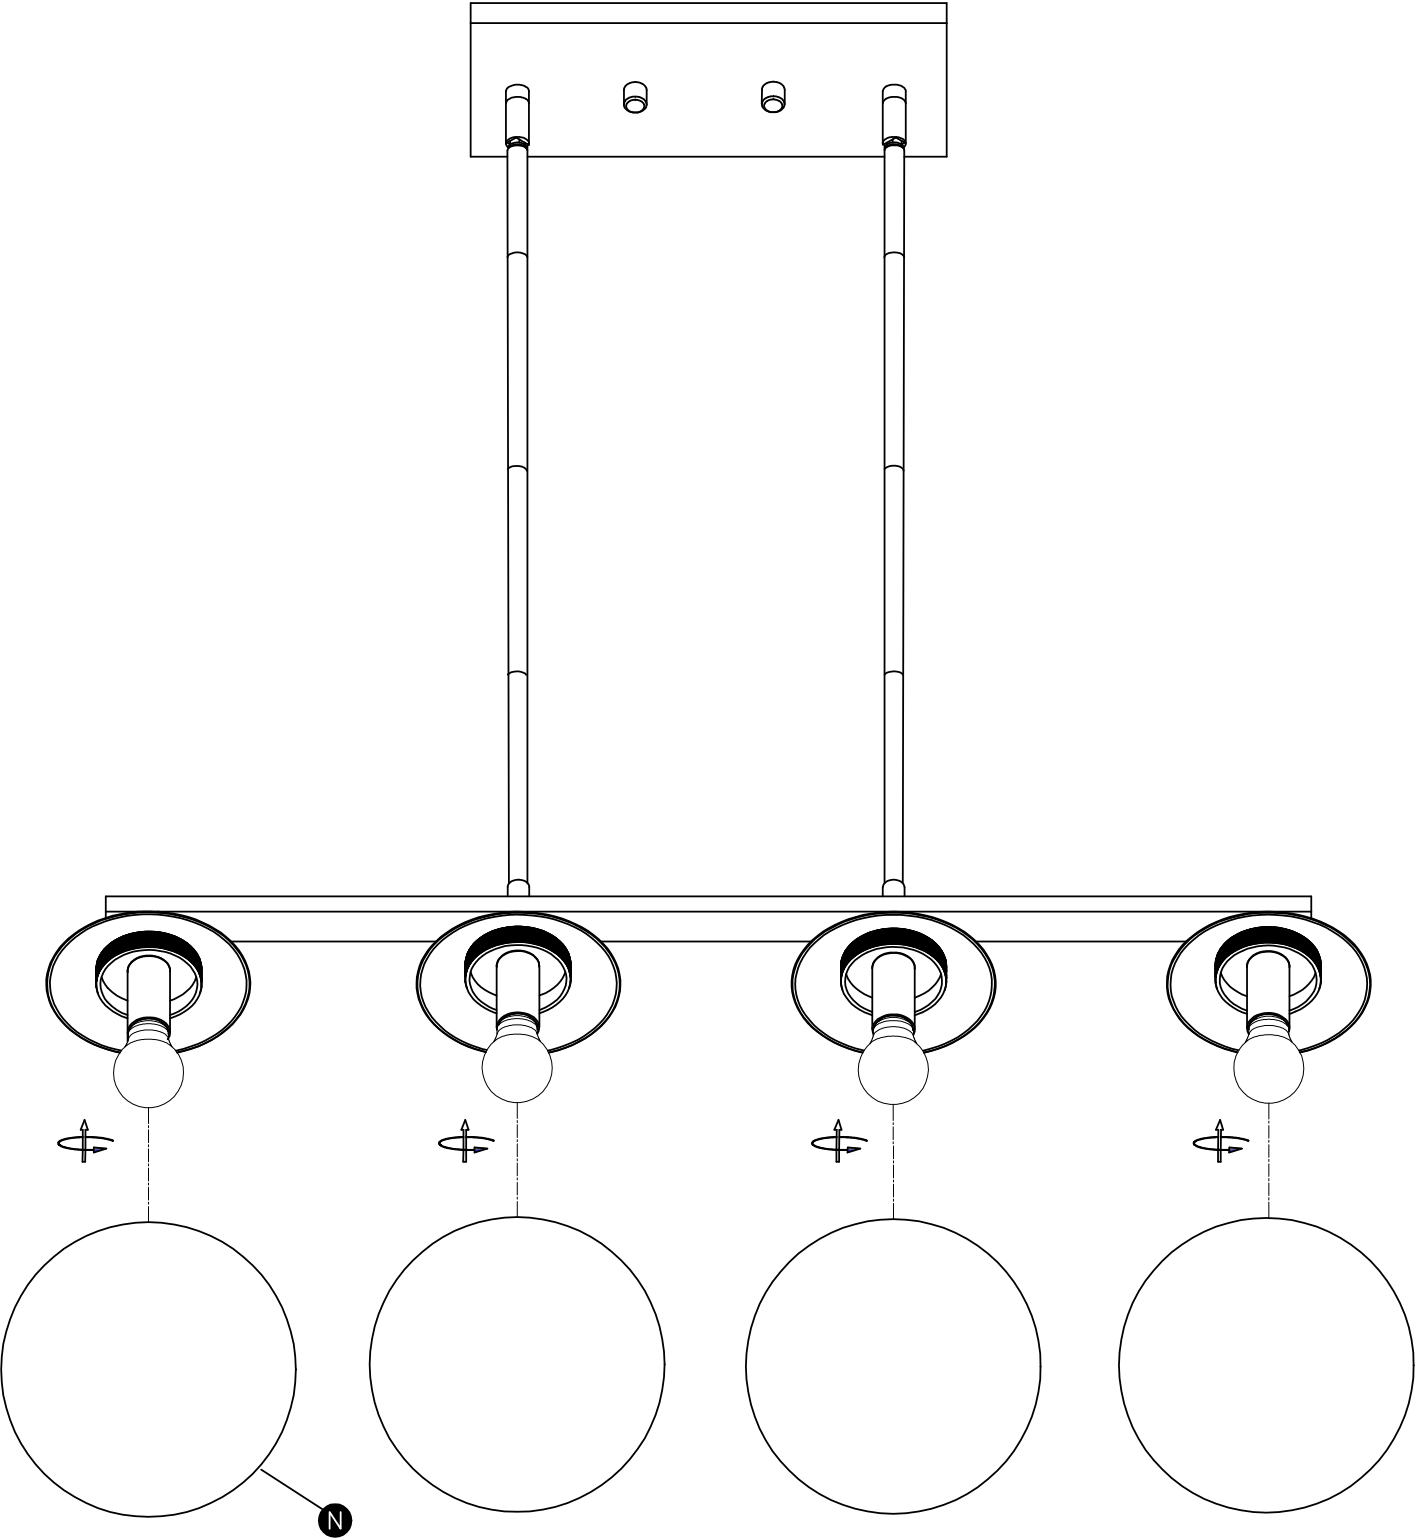

! Rotate the Shade(N) in the direction of away arrow , do not over tighten to have more easy removal



9

- ! Hold the cap and arm while removing the glass shade.

