


ARTICLE.

VERSION 1.2

Assembly Instructions

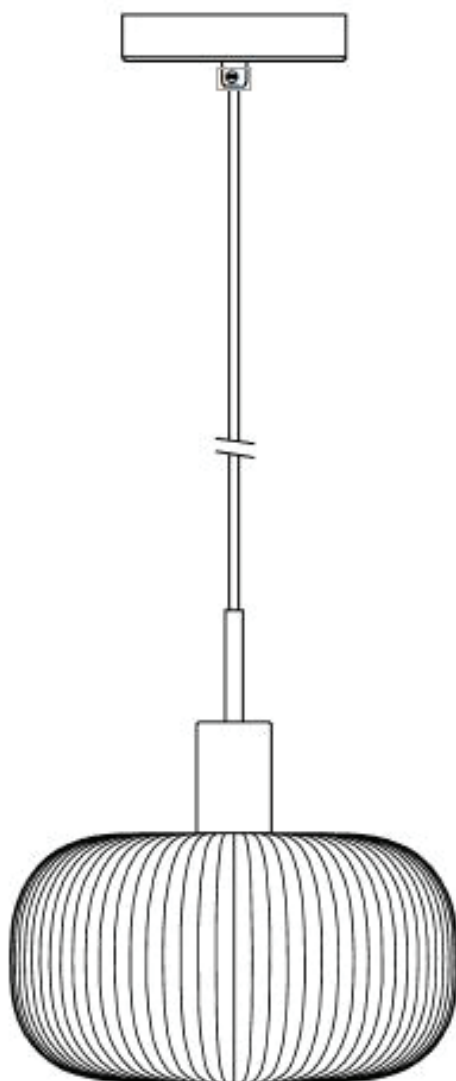

KIPP


Glass Pendant Lamp

ASSEMBLY INSTRUCTIONS





Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.


When assembling, place all parts on a soft, clean, and flat surface such as a carpet to prevent scratches.

If you’re having difficulty, our friendly Customer Care team is always here to help. Call us at **1.888.746.3455** during business hours, email **service@article.com** or chat live at **article.com**.




Consultation with a professional electrician is recommended for the installation of this pendant lamp.


PARTS INVENTORY			
ID	DESCRIPTION		QTY
A	CROSSBAR BRACKET (PRE-INSTALLED)		1
B	LONG SCREW 8/32x25mm		2
C	WIRE NUT		3
D	SHORT GREEN SCREW M6x6mm (PRE-INSTALLED)		1
E	PENDANT LAMP WIRE		1
F	CANOPY PLATE (PRE-INSTALLED)		1
G	MEDIUM SCREW M4x12mm (PRE-INSTALLED)		2
H	SHADE		1
I	SOCKET RING (PRE-INSTALLED)		1
J	BULB (E26 4W LED A19)		1




TIME




DIFFICULTY



OF PEOPLE




REQUIRED TOOL




CAUTION

Turn off power at main circuit panel before starting installation.


1

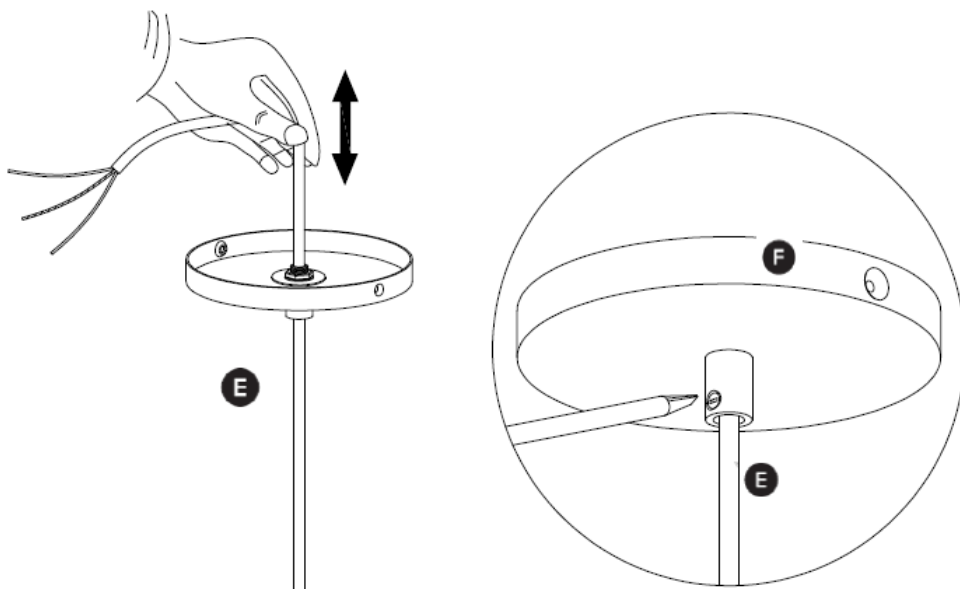

Adjust the height according to the desired length by loosening the screw on the canopy plate(F).



**REQUIRED TOOL**

2

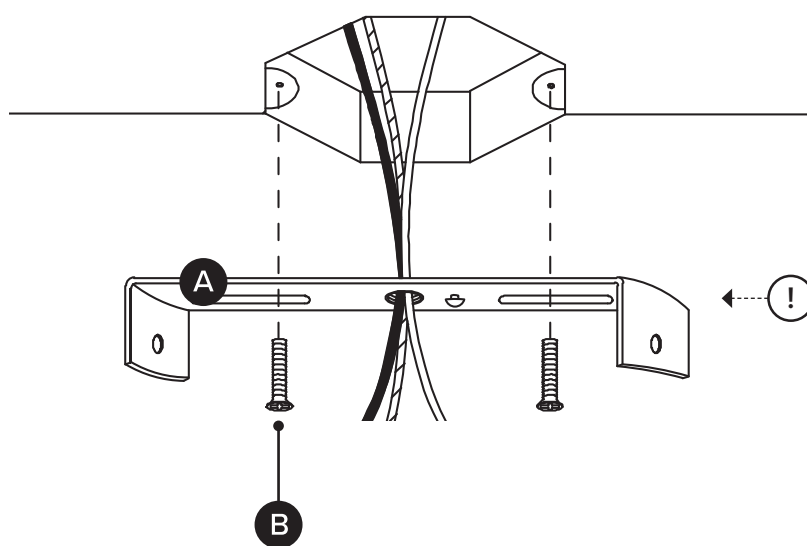



Remove crossbar bracket (A) from canopy plate (F) and thread wires through before attaching to junction box.

3

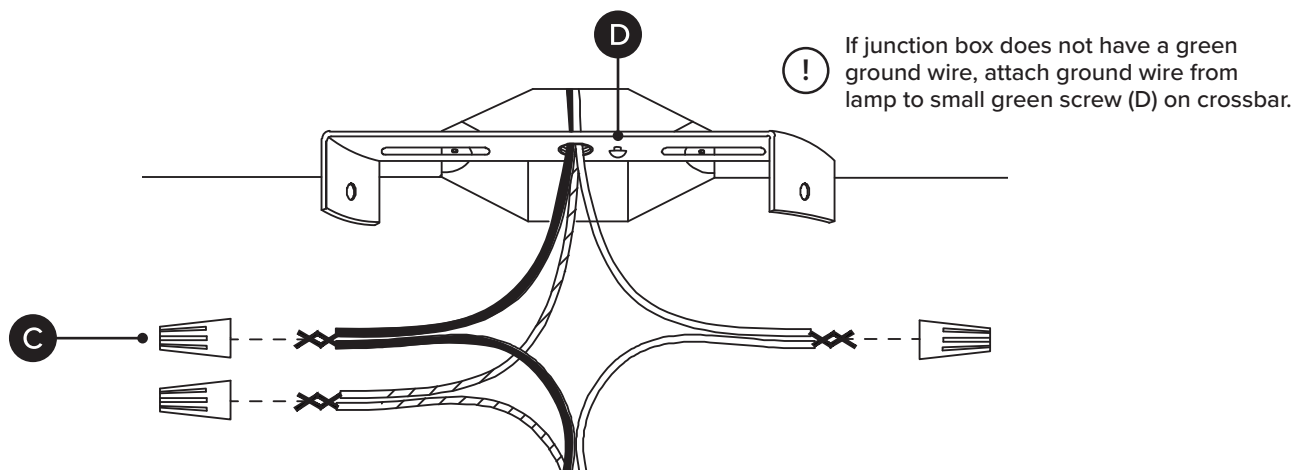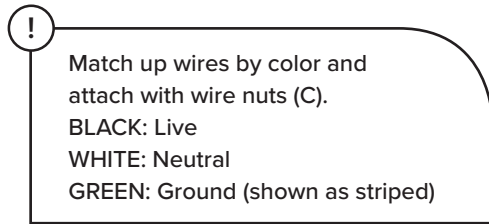

4

Screw both canopy pate(F) to Crossbar Bracket(A) by using 2 Medium Screw(G) that is pre-installed on the Canopy plate(F)

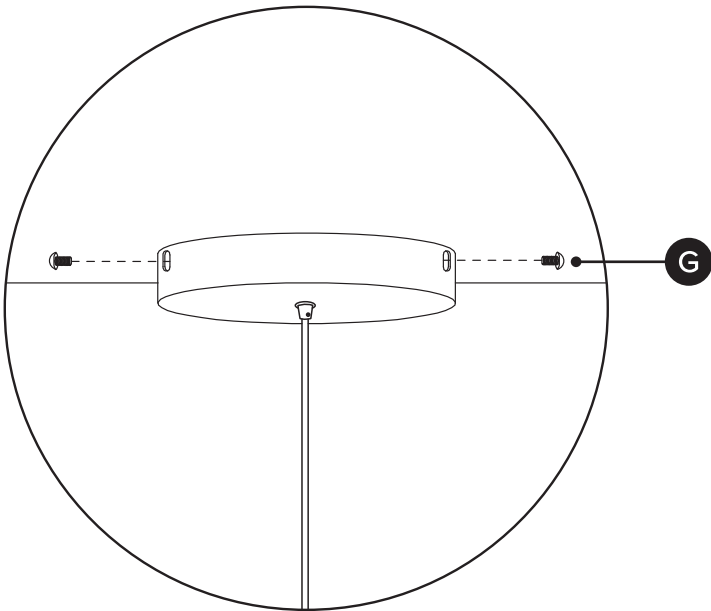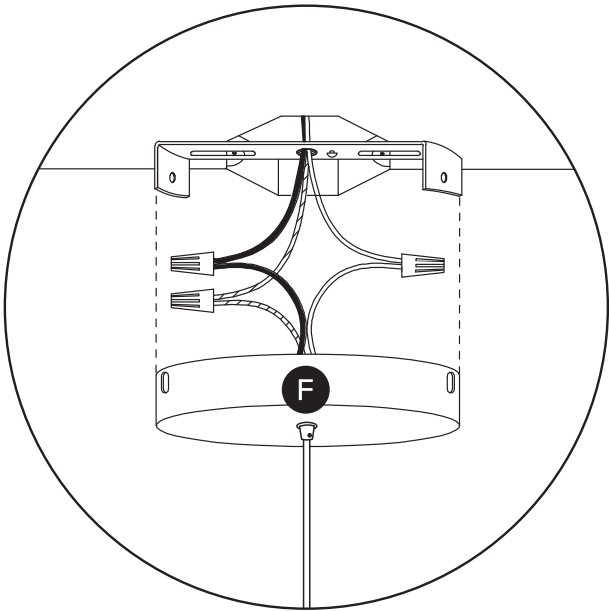

5

