
VERSION 2.0

ARTICLE.

Assembly Instructions

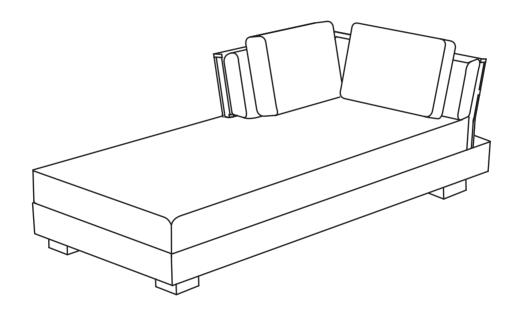

LUBEK

Left Chaise

ASSEMBLY INSTRUCTIONS

Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.

When assembling, place all parts on a soft, clean, and flat surface such as a carpet to prevent scratches.

If you're having difficulty, our friendly Customer Care team is always here to help. Call us at 1.888.746.3455 during business hours, email service@article.com or chat live at article.com.





Hardware may loosen over time, check the bolts regularly and tighten if necessary.


PARTS INVENTORY				
ID	DESCRIPTION		QTY	
0	M6 WASHER		4	
0	M6 LOCK WASHER		4	
K	M6 x 20MM BOLT		4	
0	ALLEN KEY Œ		1	
M	CONNECTOR BRACKET		2	
N	M8 WASHER		8	
0	M8 LOCK WASHER		8	
P	M8 x 20MM BOLT		8	
0	M8 WASHER M8 LOCK WASHER		8	

PARTS INVENTORY					
ID	DESCRIPTION	C	QTY		
A	LEFT CHAISE SEAT		1		
B	FLOATING LEGS		2		
©	LARGE BACKREST		1		
D	SMALL BACKREST		1		
	SEAT CUSHION		1		
F	LONG BACK CUSHION		1		
G	SHORT BACK CUSHION		1		
(1)	PILLOW		2		


Secure bolts to legs (B) on the underside of left side section (A).

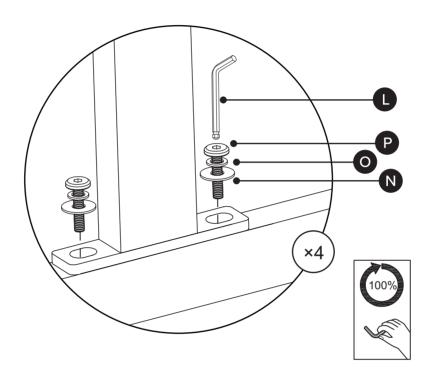


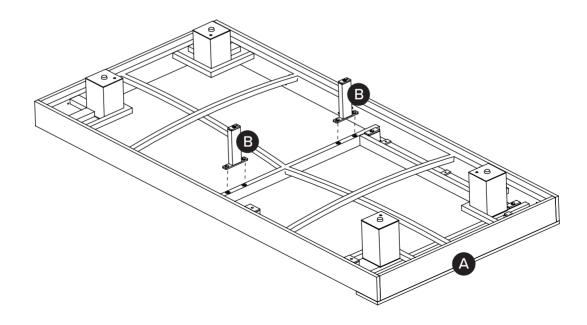

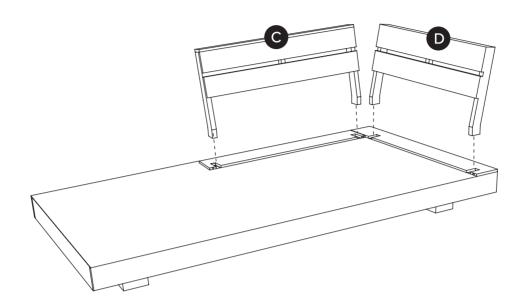


Secure bolts to large backrest (C) and small backrest (D) on the underside of **left** side section (A).

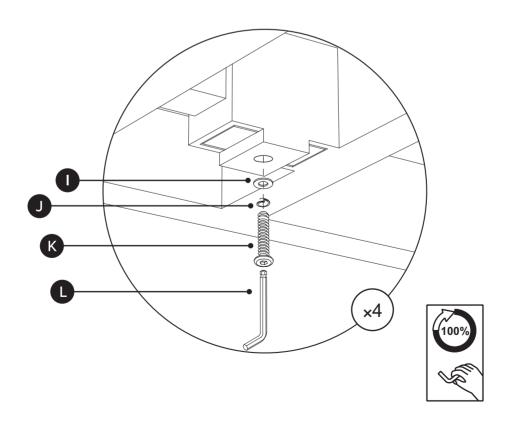


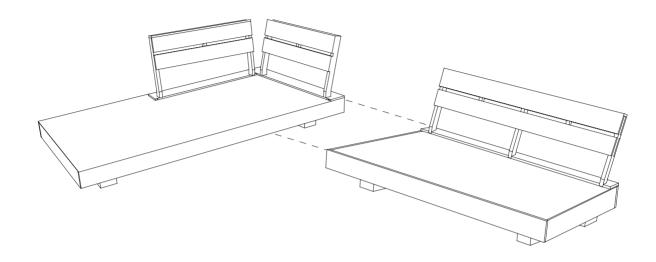


Attach sections with connector brackets (M) on the underside.

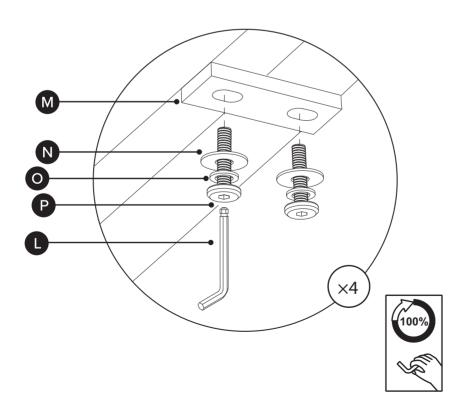



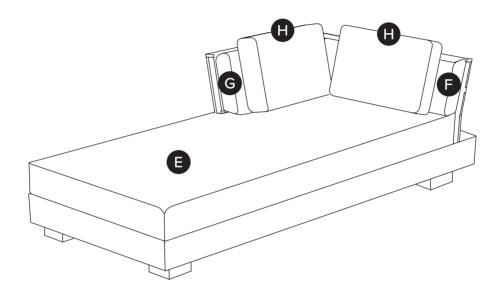



Adjust levelers on legs as needed.