


ARTICLE.

VERSION 1.1

Assembly Instructions

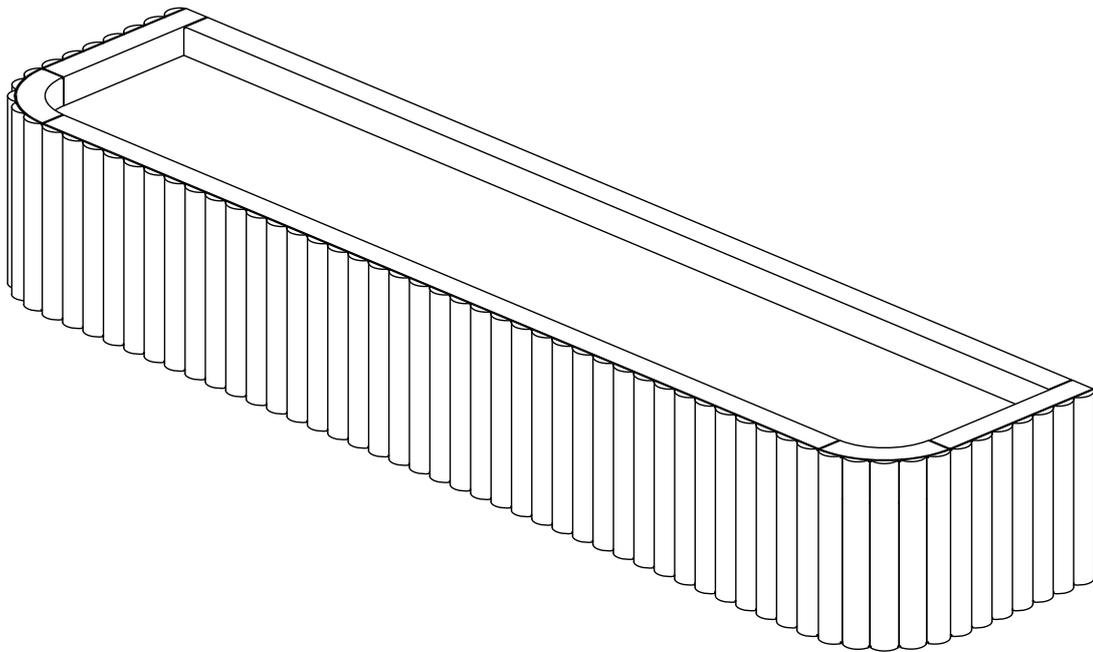

LIV


32" Shelf and Coat Rack

ASSEMBLY INSTRUCTIONS


Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.

When assembling, place all parts on a soft, clean, and flat surface such as a carpet to prevent scratches.

If you're having difficulty, our friendly Customer Care team is always here to help. Call us at **1.888.746.3455** during business hours, email service@article.com or chat live at article.com.







TIME



DIFFICULTY



OF PEOPLE



12MM / DRILL BIT




STUD FINDER

REQUIRED TOOLS

! Hardware (D/E) to attach bracket to wall is designed for drywall. To attach this unit to another type of wall, consult with your local hardware store. Two extra pieces are provided for each.



| PARTS INVENTORY | | | |
|-----------------|----------------|--|-----|
| ID | DESCRIPTION | | QTY |
| A | FLOATING SHELF | | 1 |
| B | FRENCH CLEAT | | 1 |
| C | DRILL TEMPLATE | | 1 |

| HARDWARE LIST | | | |
|---------------|----------------|--|-----|
| ID | DESCRIPTION | | QTY |
| D | SNAPTOGGLE | | 5 |
| E | M6 x 63MM BOLT | | 5 |
| F | ALLEN KEY | | 1 |

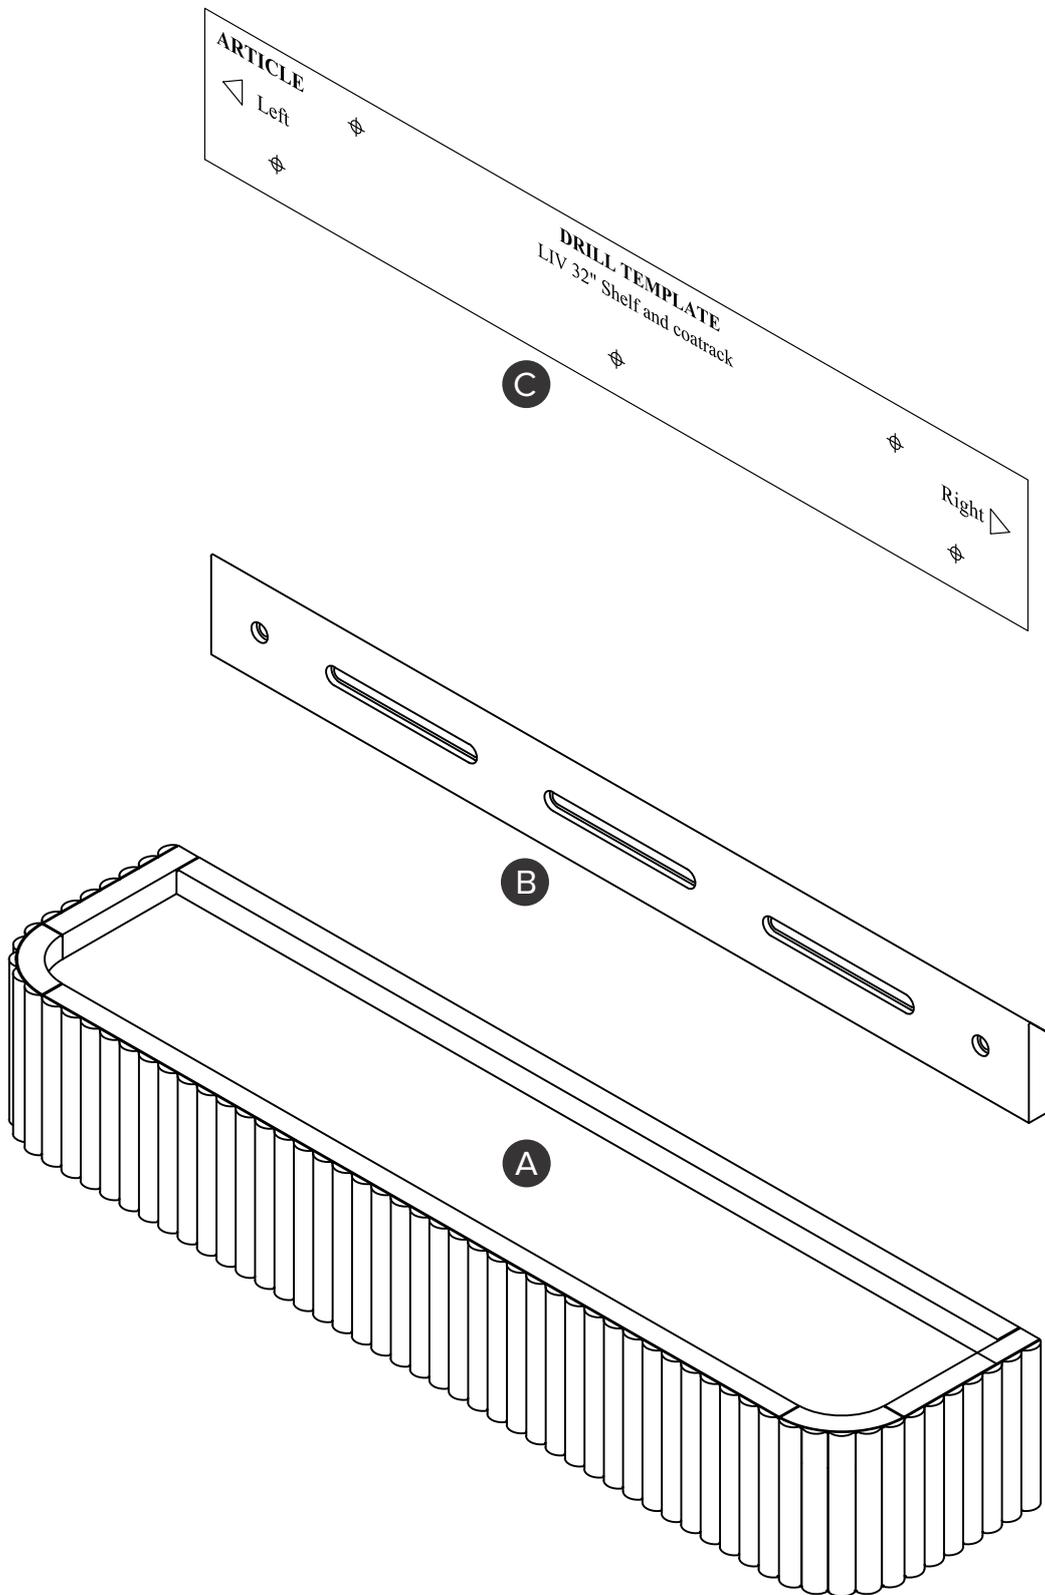

1


! Use stud finder to avoid drilling holes on the wooden studs. Our hardware (D/ E) provided are for drywall only, if your wall has different construction, please consult with your contractor for proper hardware.

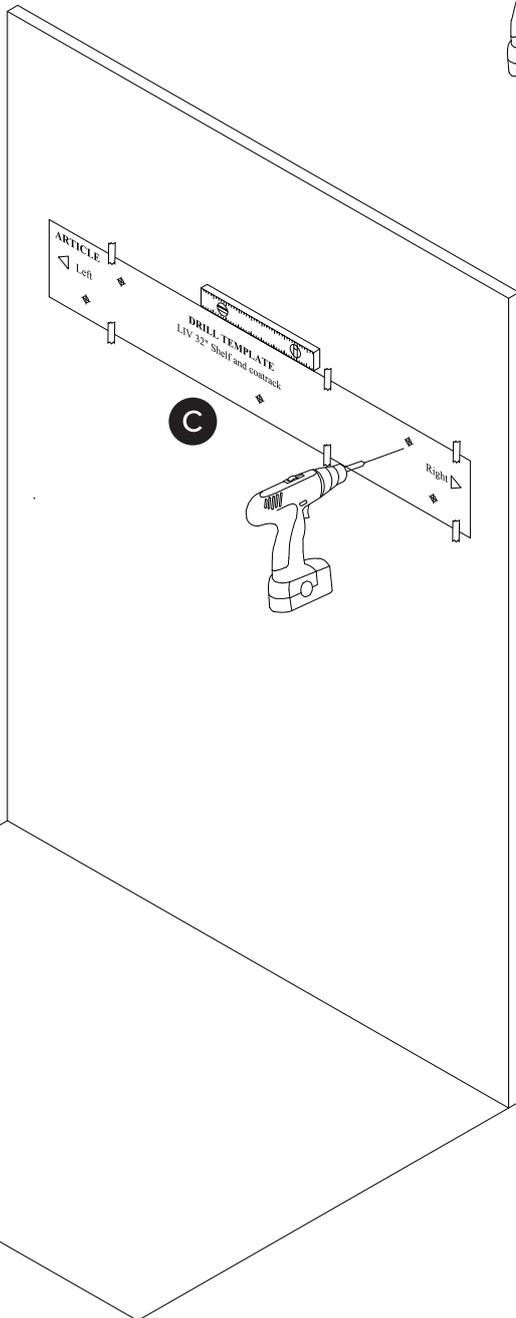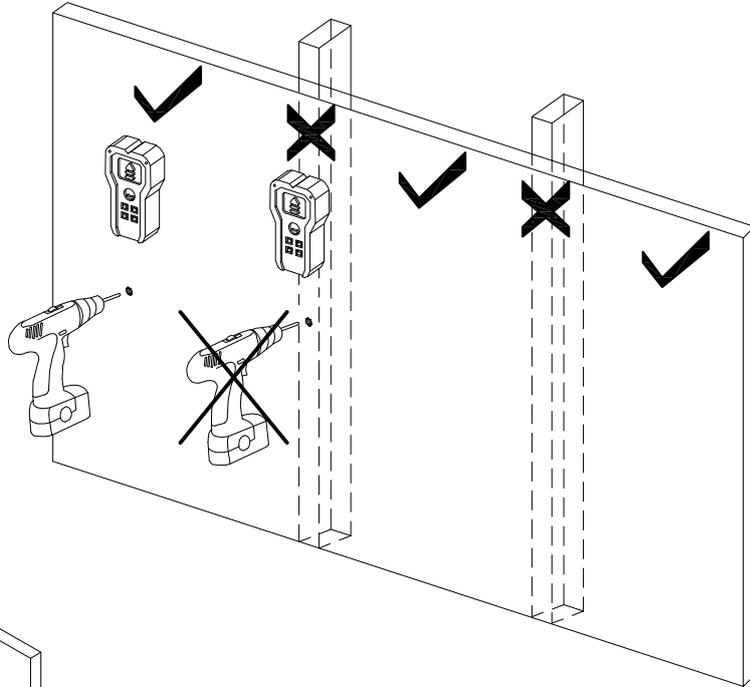

2A

PLEASE READ THE INSTRUCTIONS BEFORE ATTACHING THE HARDWARE.


! CHECK THE SNAP TOGGLE AND MAKE SURE NOTHING IS STUCK OR DAMAGED. CAREFULLY AND SLOWLY FOLLOW THE STEPS ONE BY ONE.

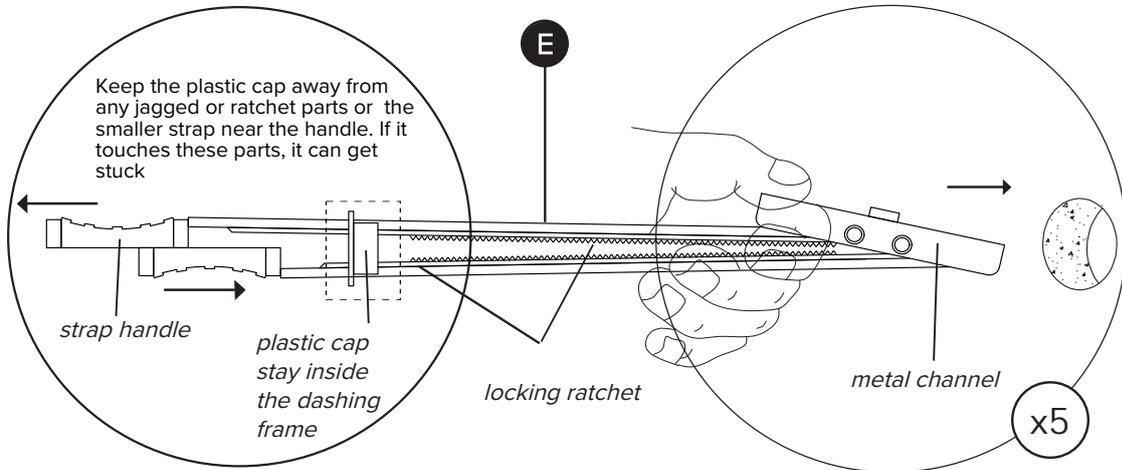



2B

! Slide one handle of the plastic trap to straighten the metal, then insert it into the wall holes.

! Pull the plastic trap backward until 2 ends aligned in order to make the metal channel rests flush behind the wall vertically.

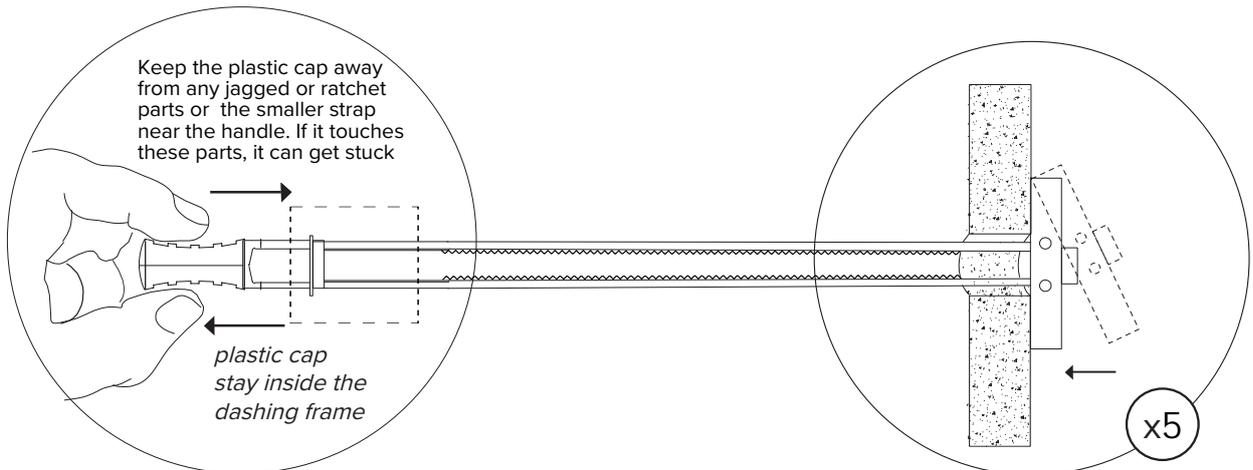

2C

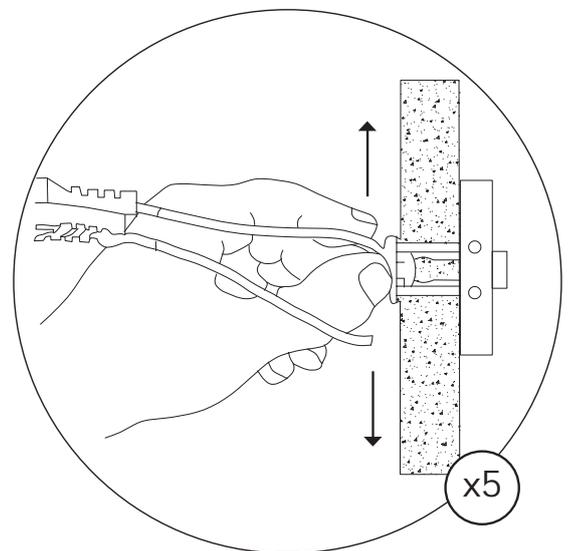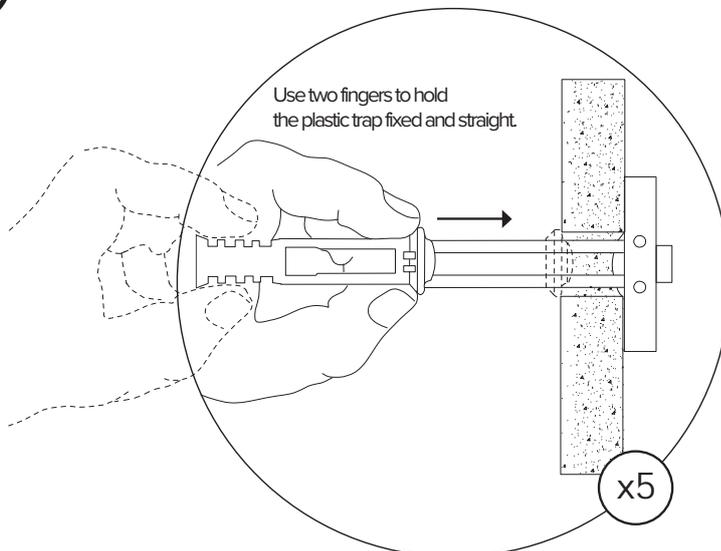


! Slide the plastic cap along the straps until flange of cap is flush with the wall

! Place thumb between 2 plastic straps. Push side to side, snapping off straps level with flange of cap.



3




WRONG




RIGHT

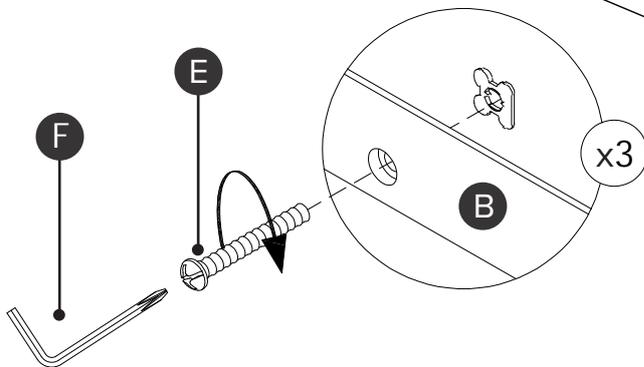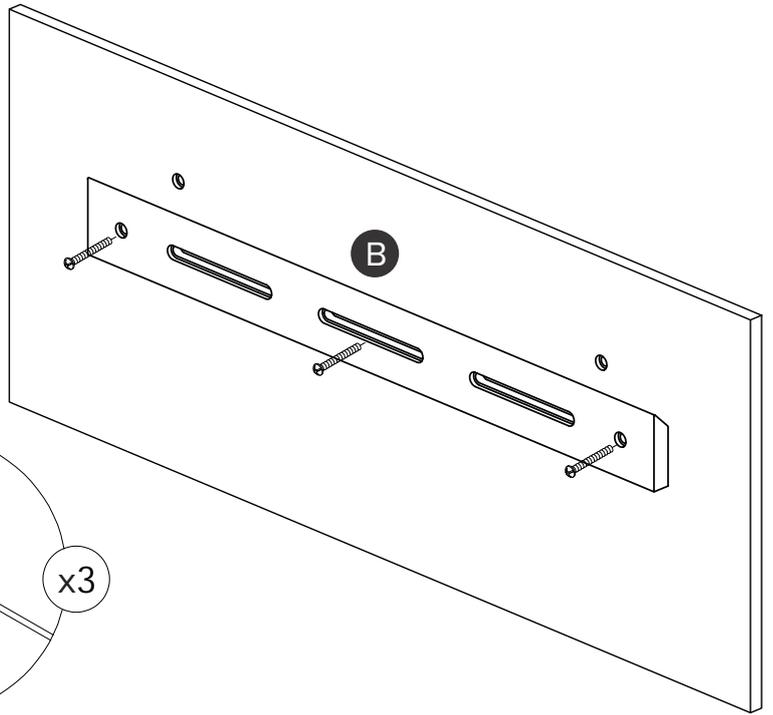

4

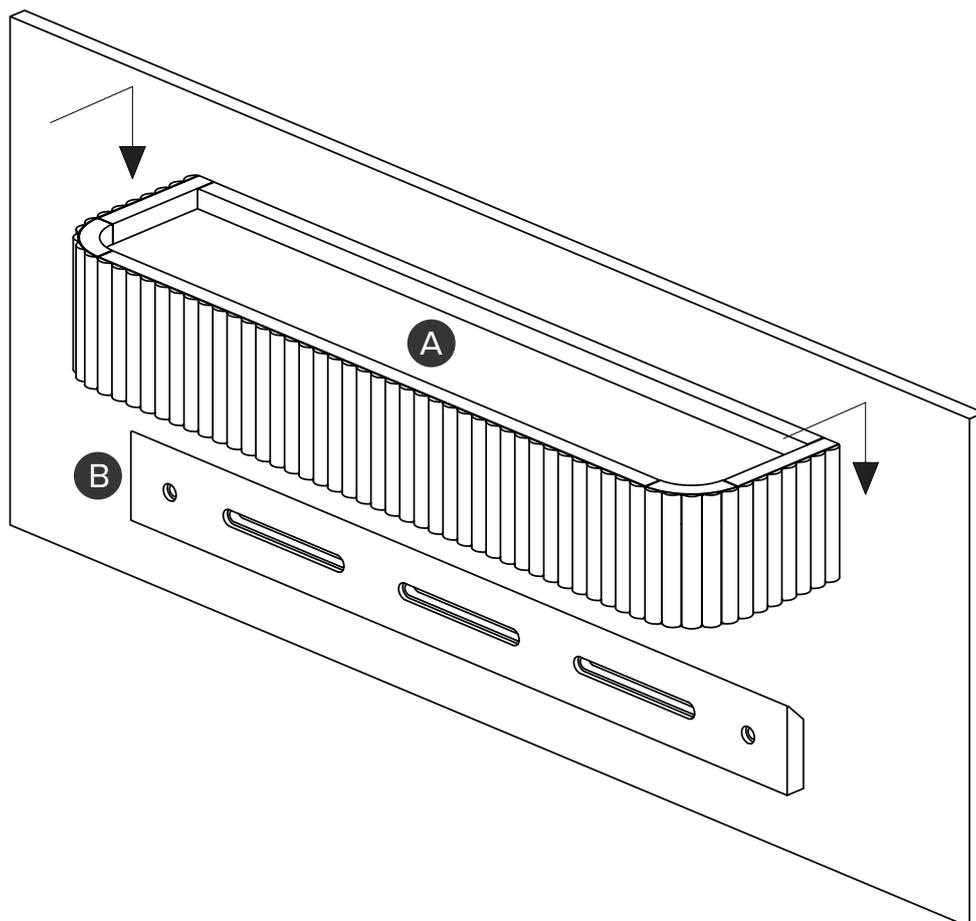

5

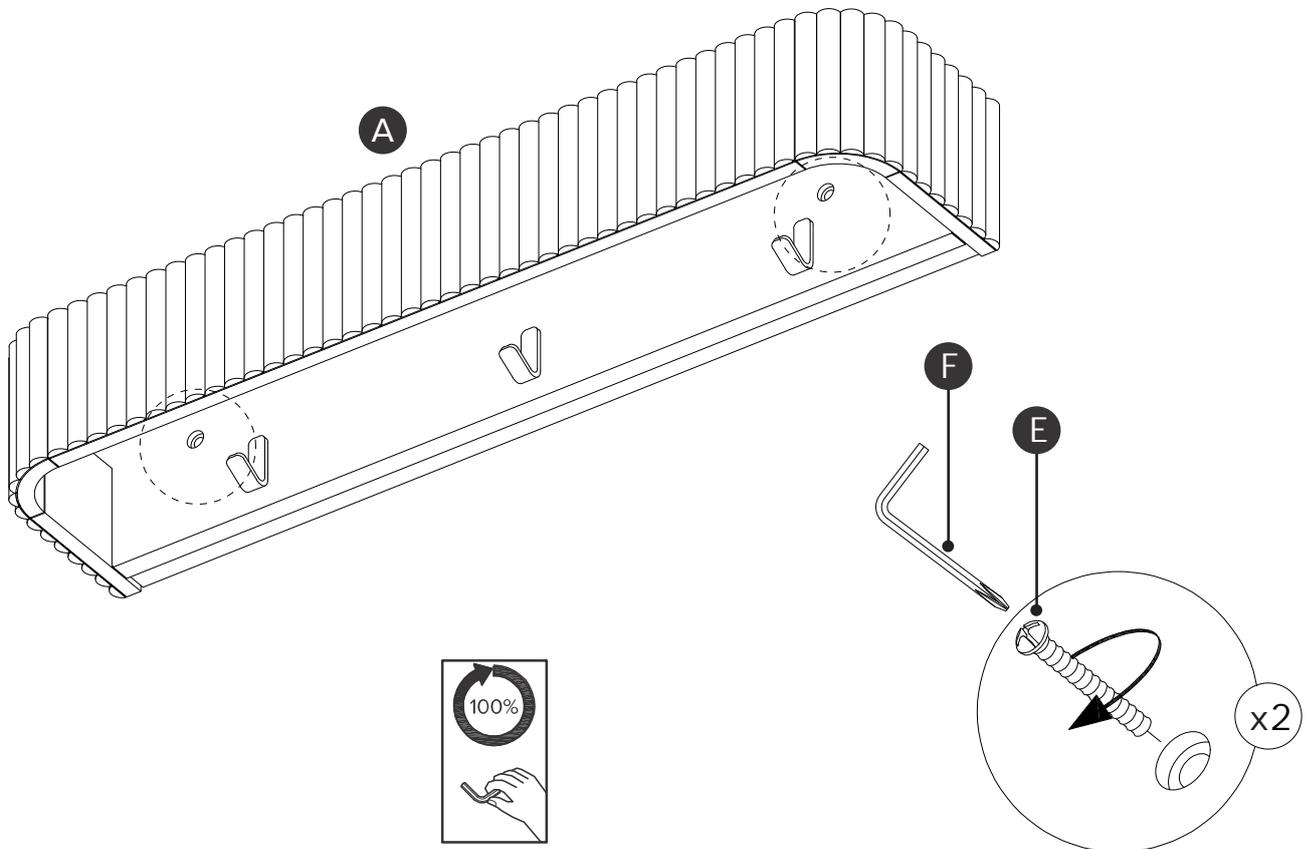

! Tighten the bolts 100%

6

! Attention : Maximum load on this shelf is 44 lbs.

